

13790510059





5

4


3

2

1

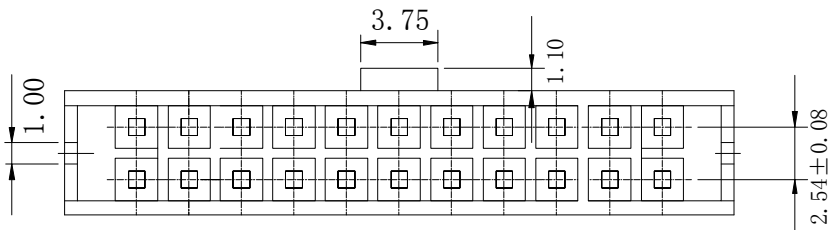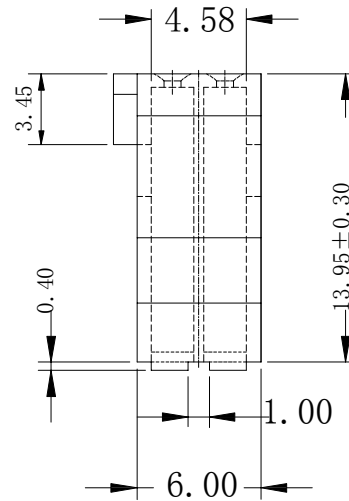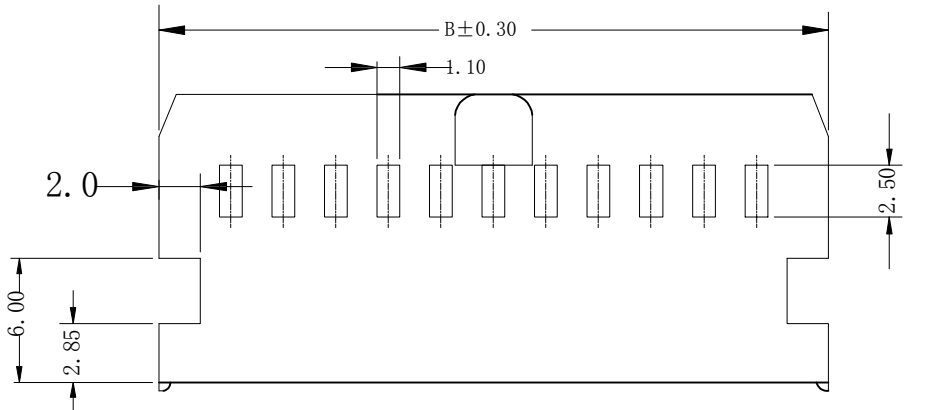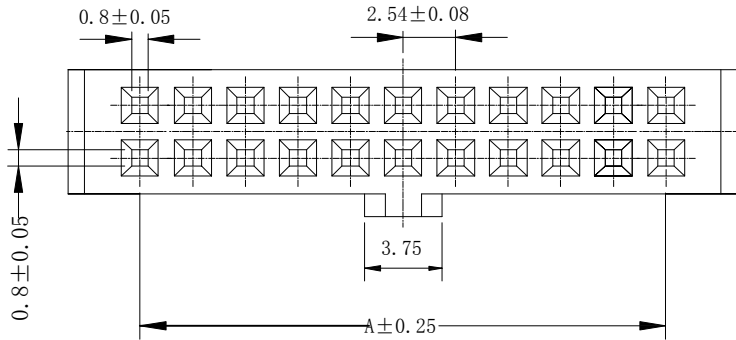

PIN NO.	A	B	PIN NO.	A	B
2X2PIN	2.54	9.48	2X17PIN	40.64	47.58
2X3PIN	5.08	12.02	2X18PIN	43.18	50.12
2X4PIN	7.62	14.56	2X19PIN	45.72	52.66
2X5PIN	10.16	17.10	2X20PIN	48.26	55.20
2X6PIN	12.70	19.64	2X21PIN	50.80	57.74
2X7PIN	15.24	22.18	2X22PIN	53.34	60.28
2X8PIN	17.78	24.72	2X23PIN	55.88	62.82
2X9PIN	20.32	27.26	2X24PIN	58.42	65.36
2X10PIN	22.86	29.80	2X25PIN	60.96	67.90
2X11PIN	25.40	32.34	2X26PIN	63.50	70.44
2X12PIN	27.94	34.88	2X27PIN	66.04	72.98
2X13PIN	30.48	37.42	2X28PIN	68.58	75.52
2X14PIN	33.02	39.96	2X29PIN	71.12	78.06
2X15PIN	35.56	42.50	2X30PIN	73.66	80.60
2X16PIN	38.10	45.04	2X31PIN	76.20	83.14
			2X32PIN	78.74	85.68

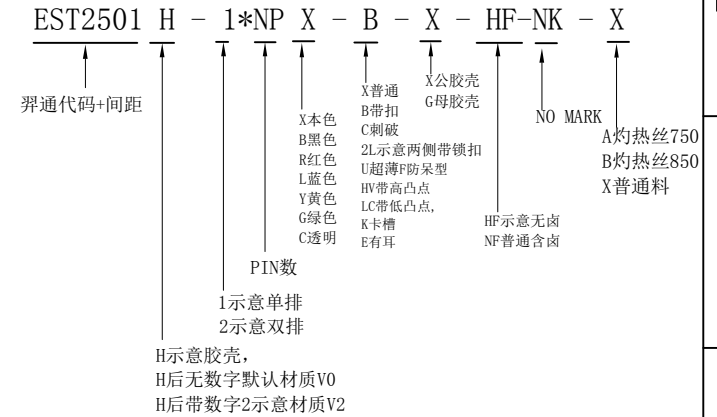

**SPECIFICATIONS**

- Voltage rating: 250V AC/DC;
- Current rating: 3A AC/DC;
- Withstanding Voltage: 1000V AC/minute
- Insulation resistance: 1000MΩ Min
- Temperature range: -25°C ~ +85°C
- Contact resistance: 20mΩ Max
- Material: PBT

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY



东莞市羿通实业有限公司  
DONGGUAN EASTOM ELECTRONIC Co., Ltd.


料号PART NO: EST2506H-2\*NPX-X-X

品名 TITLE: 2506-H

材料: 单位: MM 包装规格: 比例: 1:1

制图: 审核: 核准: 日期: 2022. 7. 14

一般公差  
GENERAL TOLERANCE  
X. X ±0.30  
X. XX ±0.25  
ANGLE ±1°



6

5

4

3

2

1

SH