

13790510059

5



4

3

2

1



Specification:
 Current rating:3A AC,DC
 Voltage rating:250V AC,DC
 Temperature range:-20℃~+85℃
 Contact resistance: ≤ 10MΩ
 Withstanding voltage:800V AC/Minute
 After environmental testing: ≤ 20MΩ
 Material:
 Pin:Brass/tin-plated
 Wafer:PA66 UL94-V0

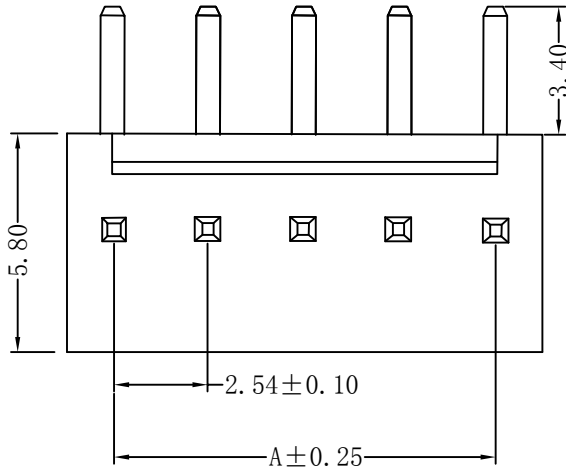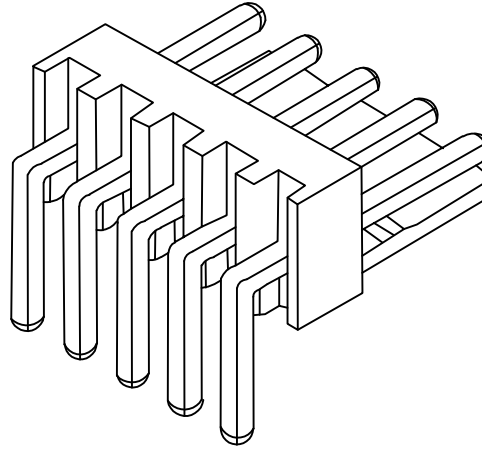


EST2510 W V - 1*NP X - X - X X - NK-HF

↑ 普通代码-间距 ↑ 1单排 ↑ PIN数 ↑ X本色 ↑ X普通 ↑ X X - NK-HF
 ↑ 2双排 ↑ 2双排 ↑ L蓝色 ↑ R红色 ↑ B带扣 ↑ C为PIN针镀金 ↑ S为PIN针镀锡 ↑ 1为PPS, 2为PBT, 3为LCP, 4为ABS, 5为PA6T, 6为PA66
 ↑ U超薄 ↑ P组合排针 ↑ F组合排母 ↑ H高弯 ↑ K打脚 ↑ D防呆型 ↑ 2示意有柱 ↑ 1为无孔 ↑ NF普通含向 ↑ NK为NO MARK ↑ HK为有MARK

V示意180°直针, VS立式
 R示意90°弯针, RS卧式
 W示意针座
 W后无0默认材质为V0
 W后带2示意V2

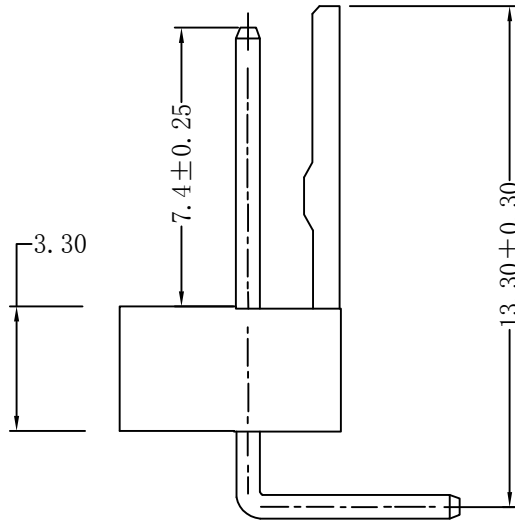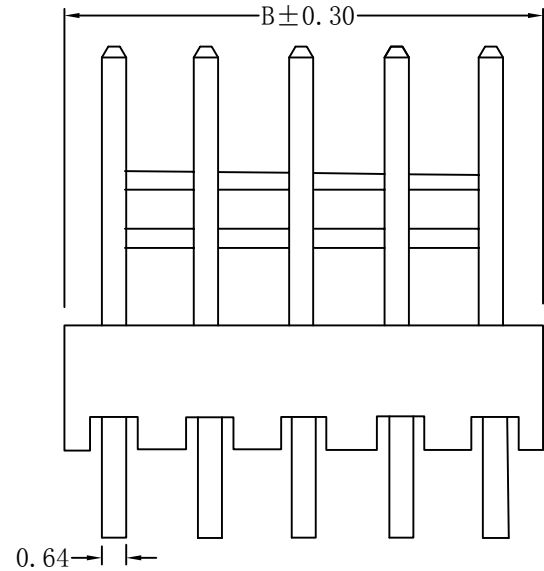

PIN	A	B
1*2	2.54	5.08
1*3	5.08	7.62
1*4	7.62	10.16
1*5	10.16	12.70
1*6	12.7	15.24
1*7	15.24	17.78
1*8	17.78	20.32
1*9	20.32	22.86
1*10	22.86	25.40
1*11	25.40	27.94
1*12	27.94	30.48
1*13	30.48	33.02
1*14	33.02	35.56
1*15	35.56	38.10
1*16	38.10	40.64
1*17	40.64	43.18
1*18	43.18	45.72
1*19	45.72	48.26
1*20	48.26	50.80

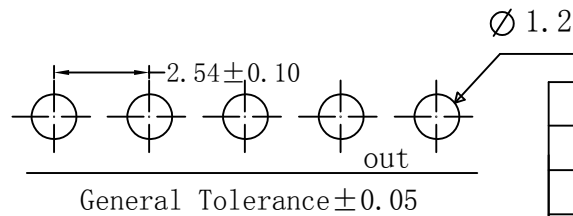

东莞市羿通实业有限公司
 DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2510WR-1*NPX-H
 品名 TITLE: 2510-wafer90°
 材料: PV66-V2 单位: MM 包装规格: 比例: 1:1
 制图: 审核: 核准: 日期: 2022. 5. 29

一般公差
 GENERAL TOLERANCE
 X, X ± 0.25
 X, XX ± 0.20
 ANGLE ± 1°

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY

6

5

4

3

2

1