

151790510009

5

4

3

2

F

F

E

E

D

D

C


C

B

B


A

A


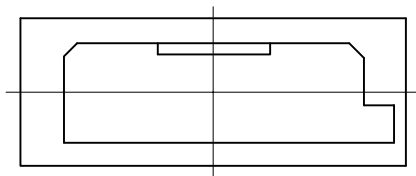


10.20±0.25

4.18±0.20

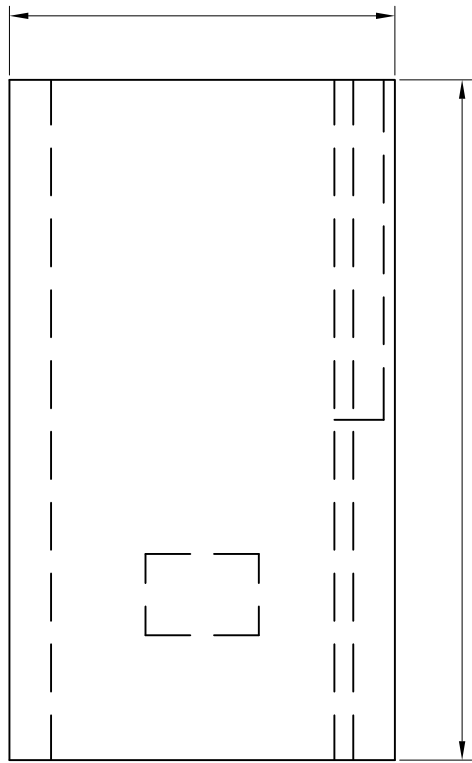

18.10±0.30

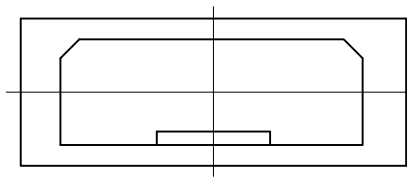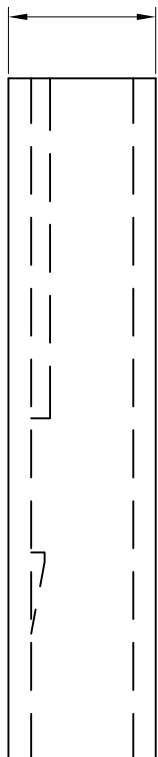

EST2512 H - 1*3P B - X - G - HF-NK - X

↑
羿通代码+间距

↑
PIN数

↑
X本色
B黑色
R红色
L蓝色
Y黄色
G绿色
C透明

↑
X普通
B带扣
C刺破
2L示意两侧带锁扣
U超薄F防呆型
HV带高凸点
LC带低凸点
K卡槽
E有耳

↑
X公胶壳
G母胶壳

↑
NO MARK

↑
HF示意无卤
NF普通含卤

↑
A灼热丝750
B灼热丝850
X普通料

H示意胶壳,
H后无数字默认材质V0
H后带数字2示意材质V2

SPECIFICATIONS

Applicable wire:AWG#22~#28
Voltage rating: 250V DC/AC (rms)
Current rating:2.5A max
Withstand voltage: 800V AC(rms)
Working Temperature:-25~+85
Insulation resistance: 1000M
Contact resistance: 0.02



东莞市羿通实业有限公司

DONGGUAN EASTOM ELECTRONIC Co., Ltd.


料号PART NO: EST2512H-1*3PB-K-G

品名 TITLE: FUTAB0-3P斜角外壳

材料: PA66 UL94V2 单位: MM 包装规格: 比例: 1:1

日期版次 REVISION 日期 DATE 变更内容 DESCRIPTION 核 准 APPROVALBY 制图: LI 审核: LI 核准: LI 日期:

一般公差
GENERAL TOLERANCE
X.X ±0.30
X.XX ±0.20
ANGLE ±1°



6

5

4

3

2

1

JW