

13790510059



5

4


3

2


1

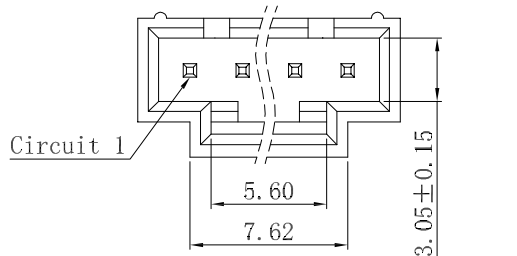





2 Poles




3 Poles



4 Poles

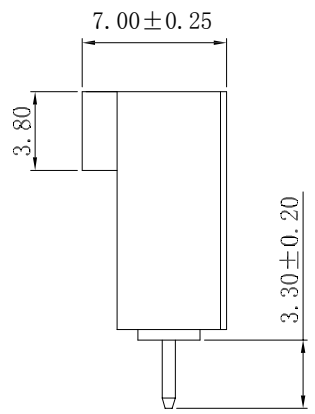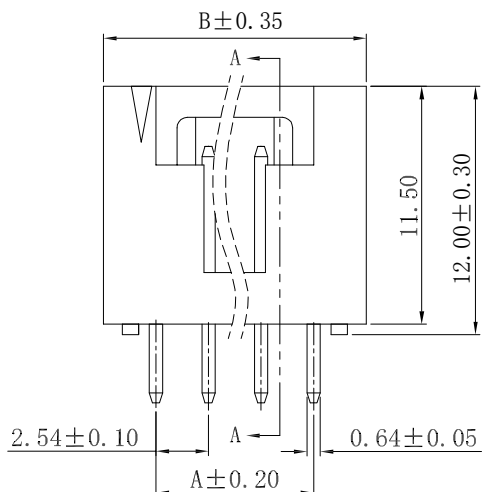

P. C. B LAYOUT



Section A--A

Poles	Dimension (mm)	
	A	B
02	2.54	7.62
03	5.08	10.16
04	7.62	12.70
05	10.16	15.24
06	12.70	17.78
07	15.24	20.32
08	17.78	22.86
09	20.32	25.40
10	22.86	27.94
11	25.40	30.48
12	27.94	33.02
13	30.48	35.56
14	33.02	38.10
15	35.56	40.64
16	38.10	43.18
17	40.64	45.72
18	43.18	48.26
19	45.72	50.80
20	48.26	53.34

EST2517 W V - 1*NP X - X - 6G - NK-HF

- ↑ 普通代码+间距
- ↑ W 示意针座
- ↑ V 示意180°直针, VS立式
- ↑ R 示意90°弯针, RS卧式
- ↑ 1*NP 1单排, 2双排
- ↑ X 本色, B黑色, R红色, L蓝色, Y黄色, G绿色
- ↑ X 普通, B带扣, U超薄, PH组合排针, F组合排母, H高弯, P平弯
- ↑ 6G XG中的X示意尼龙料, 1为PPS, 2为PBT, 3为LCP, 4为ABS, 5为PA6T, 6为PA66
- ↑ NK-HF NK为NO MARK, MK为有MARK
- ↑ HF无卤, NF普通含卤
- ↑ G 示意PIN针镀金, S为PIN针镀锡

- SPECIFICATIONS**
- Voltage rating: 250V AC/DC;
 - Current rating: 3A AC/DC;
 - Withstanding Voltage: 1500V AC/minute
 - Insulation resistance: 1000MΩ Min
 - Temperature range: -25°C~+85°C
 - Contact resistance: 20mΩ Max
 - Poles: 2-20P
 - Housing Material: PA66 UL94-V0
 - PIN Material: Brass

EST DGEASTOM 东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2517WV-1*NPX-B			一般公差 GENERAL TOLERANCE	
品名 TITLE: MX2.54直针(原厂代勾)			X.X ±0.30	ANGLE ±1°
材料:			X.XX ±0.25	
日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY	制图:
				单位: MM
				包装规格:
				比例: 1:1
				日期: 2022.4.27

6

5

4

3

2

1

XY