

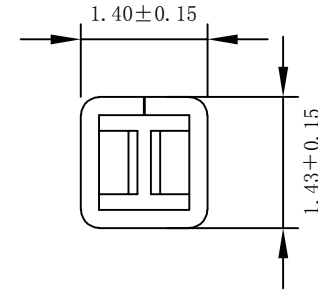


a-a SECTION

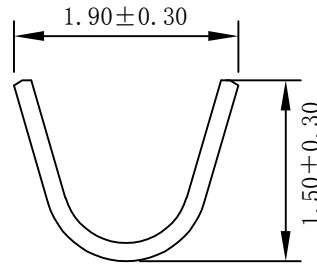

c-c SECTION

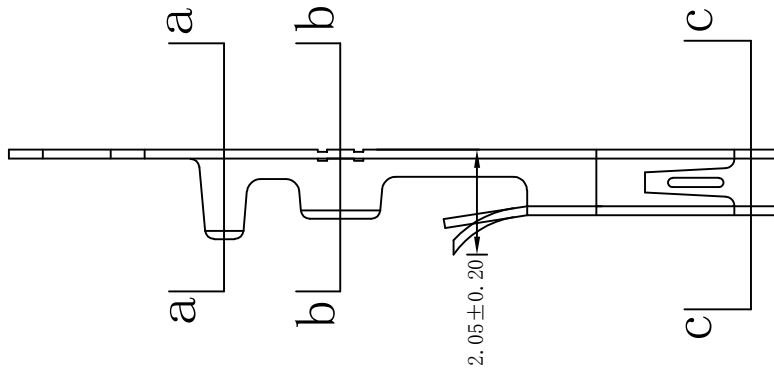

b-b SECTION

EST2517 T P X - 2 X - G

↑ 羿通代码+间距 ↑ T示意端子 ↑ X普通脚 ↑ H高脚 ↑ E增高脚 ↑ 0素材 ↑ 2镀锡先冲后镀 ↑ 3镀锡先镀后冲 ↑ 5G、15G示意镀金5U"或15U" ↑ 1G示意镀金1U"

↑ X公端 ↑ G母端 ↑ C示意90° ↑ S示意180°

P磷铜 B黄铜 E合金铜

SPECIFICATIONS

- Applicable wire:AWG#22~#28
- Voltage rating: 250V DC/AC (rms)
- Current rating:2.5A
- Withstand voltage: 800V AC(rms)
- Working Temperature:-25℃+85℃
- Insulation resistance:≥1000MΩ
- Contact resistance:≤0.02Ω

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2517TPX-2X-G

品名 TITLE: YCDG-T

材料: C5191	单位: MM	包装规格: 10K/卷	比例: 1:1
制图: 胡宗星	审核: 李园	核准: 李海平	日期: 2022/7/19

一般公差
GENERAL TOLERANCE
X.X ±0.30
X.XX ±0.25
ANGLE ±1°

