



PART No	Dimension		PART No.	Dimension	
	A	B		A	B
02	2.54	5.08	11	25.40	27.94
03	5.08	7.62	12	27.94	30.48
04	7.62	10.16	13	30.48	33.02
05	10.16	12.70	14	33.02	35.56
06	12.70	15.24	15	35.56	38.1
07	15.24	17.78	16	38.10	40.64
08	17.78	20.32	17	40.64	43.10
09	20.32	22.86	18	43.10	45.64
10	22.86	25.40	20	48.18	50.72

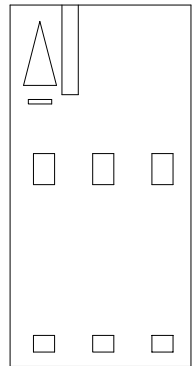


3P

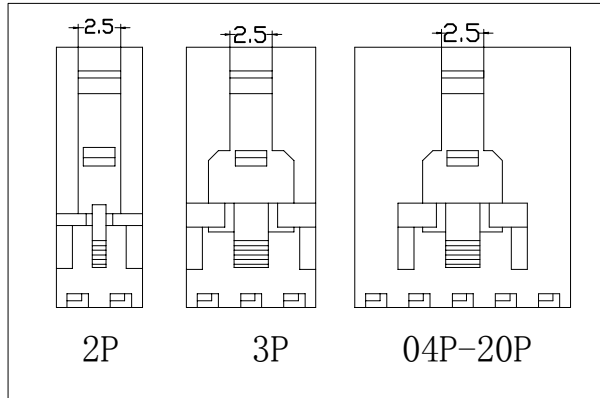

2P

3P

04P-20P

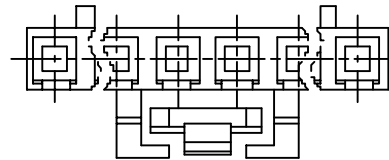

EST2517 H - 1\*NP X - B - X - HF-NK - X

↑ 羿通代码+间距  
 ↑ PIN数  
 1示意单排  
 2示意双排  
 X本色  
 B黑色  
 R红色  
 L蓝色  
 Y黄色  
 G绿色  
 C透明  
 X普通  
 B带扣  
 C刺破  
 2L示意两侧带锁扣  
 U超薄  
 F防呆型  
 HV带高凸点  
 LC带低凸点  
 K卡槽  
 E有耳  
 X公胶壳  
 G母胶壳  
 NO MARK  
 HF示意无齿  
 NP普通含铜  
 A灼热丝750  
 B灼热丝850  
 X普通料

SPECIFICATIONS:

- 1-Voltage rating:250V AC/DC;
- 2-Current Rating:2.5A AC/DC;
- 3-Withstanding Voltage:1000V AC/minute;
- 4-Temperature Range:-25°C~+85°C;
- 5-Insulation Resistance:1000mΩ
- 6-Cpmtact Resostamce:20mΩ
- 7-Material:PA66



**东莞市羿通实业有限公司**  
**DONGGUAN EASTOM ELECTRONIC Co., Ltd.**

料号PART NO: EST2517H-1\*NPX-B-X

品名 TITLE: YCDG-H

材料: PA66UL94-V0	单位: MM	包装规格: 1K/包	比例: 1:1
制图: LI	审核: LI	核准: LI	日期: 2022/04/12

一般公差 GENERAL TOLERANCE	
X.X	±0.15
X.XX	±0.10
X.XXX	±0.05
ANGLE	±1°

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY

