

13790510059





5

4

3

2

1

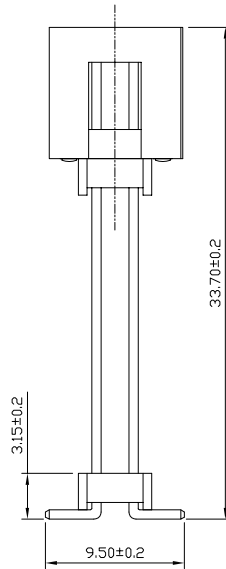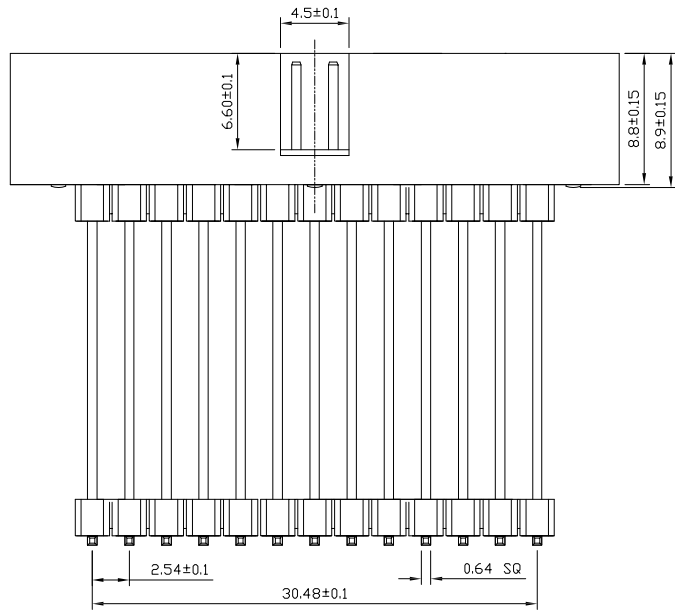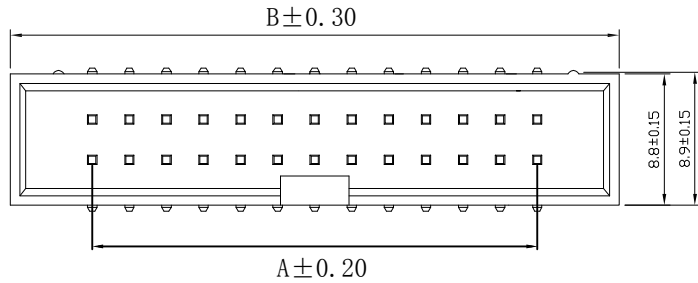

No. of	DIM. A	DIM. B	No. of	DIM. A	DIM. B	No. of	DIM. A	DIM. B
6	5.08	7.62	20	22.86	25.40	36	43.18	45.72
8	7.62	10.16	24	27.94	30.48	40	48.26	50.80
10	10.16	12.70	26	30.48	33.02	44	53.34	55.88
12	12.70	15.24	28	33.02	35.56	50	60.96	63.50
14	15.24	17.78	30	35.56	38.10	60	73.66	76.20
16	17.78	20.32	32	38.10	40.64	64	78.74	81.28
18	20.32	22.86	34	40.64	43.18			

EST2504 W VS- 2*NP X - X - X X - NK-HF

W 示意针座
 W后无0默认材质为V0
 W后带2示意V2
 VS 示180°直针, VS立式
 R 示90°弯针, RS卧式
 RG 高弯
 1 单排
 2 双排
 X 本色
 B 黑色
 R 红色
 L 蓝色
 Y 黄色
 G 绿色
 X 普通
 B 带扣
 U 超薄
 PH 组合排针
 FH 组合排母
 H 高弯
 K 打脚K
 D 防呆型
 2 示意有柱
 LO 带定位无K
 KLO 带定位打K
 G 为PIN针镀金
 S 为PIN针镀锡
 NK 为NO MARK
 MK 为有MARK
 HF 无卤
 NF 普通含卤
 1 为PPS, 2 为PBT, 3 为LCP, 4 为ABS, 5 为PA6T, 6 为PA66

SPECIFICATIONS

Current Rating: 3Amps
 Insulation Resistance: 1000MΩ Min
 Contact Resistance: 20MΩ Max
 Withstanding Voltage: AC 1000V
 Operation Temperature: -40° to +105°
 Contact Material: Brass
 Standard: PBT
 Insulator Material: Polyester (UL 94V-0)
 Contact Plating: Gold Flash
 Max. Processing Temp: 200° C for 30-60seconds
 (220° C for 5seconds)

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVAL BY

东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2504WVS-2*NPX-PH			一般公差 GENERAL TOLERANCE X.X ±0.30 X.XX ±0.25 ANGLE ±1°
品名 TITLE: 2.54排针 (双排)			
材料:	单位: MM	包装规格:	比例: 1:1
制图:	审核:	核准:	日期: 2020.5.13

6

5

4

3

2

1

YXY