





13790510059

5

4

3

2

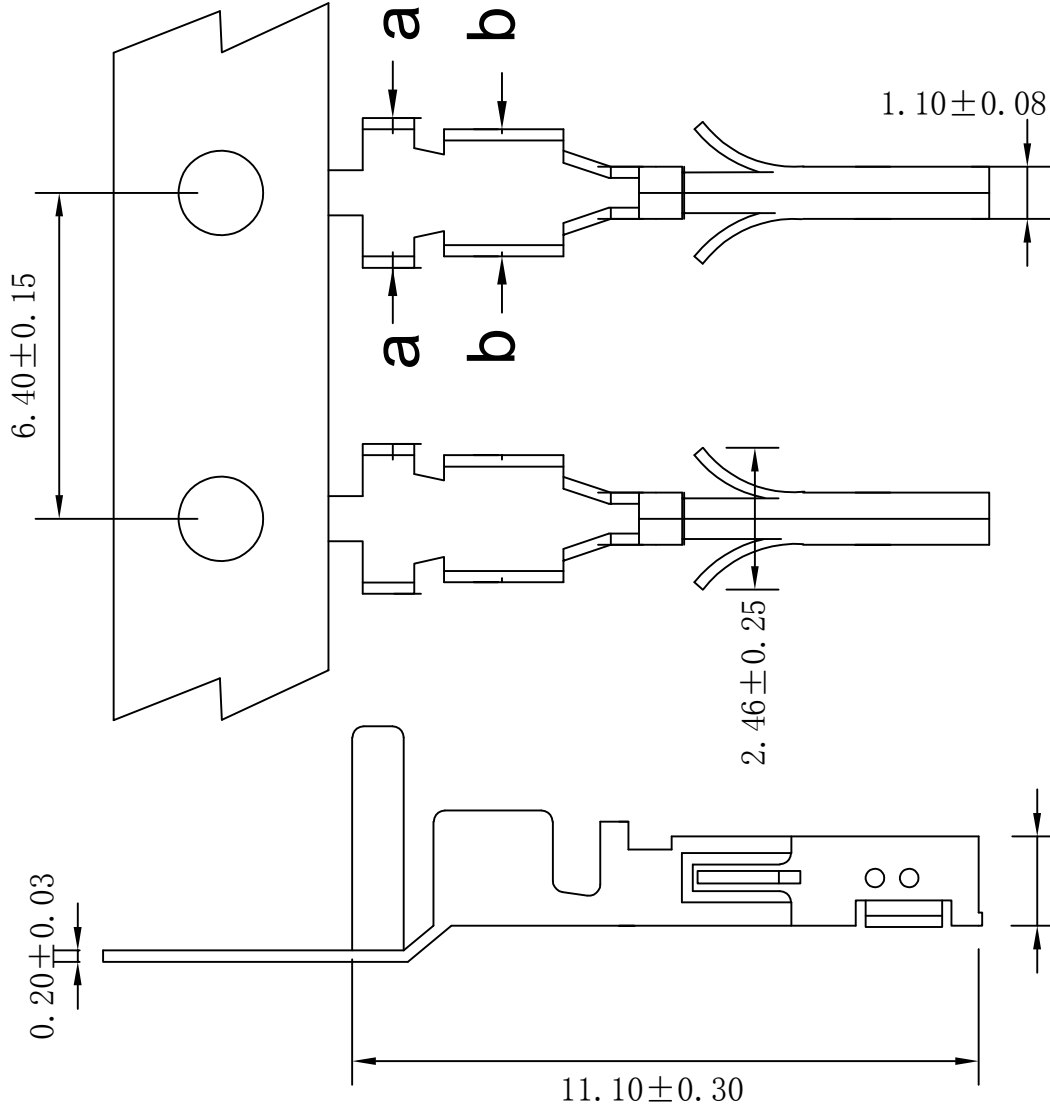

EST3001 T P X - 2 X - G


↑ 羿通代码+间距 ↑ T示意端子 ↑ X普通脚 ↑ H高脚 ↑ E增高脚 ↑ 0素材 ↑ 2镀锡先冲后镀 ↑ 3镀锡先镀后冲 ↑ 5G、15G示意镀金5U"或15U" ↑ 1G示意镀金1U"

↑ X公端 ↑ G母端 ↑ C示意90° ↑ S示意180°

P磷铜 B黄铜 E合金铜

Specifications :
 Voltage rating: 250V AC / DC
 Current rating: 5A Max AC / DC
 Withstanding voltage: 1000V AC/minute
 Temperature range: -25°C~+85°C
 Insulation resistance: ≥1000MΩ
 Contact resistance: ≤10mΩ
 After environmental testing: ≤20mΩ
 Material: C5191
 Plating mating: tin/gold
 Wire size awg: #20-#24

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVAL BY



东莞市羿通实业有限公司

DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST3001TPX-2X-G		一般公差 GENERAL TOLERANCE	
品名 TITLE: MX3.0-T(母)		X.X ±0.30	
材料: C5191	单位: MM	包装规格: 10K/卷	X.XX ±0.20
制图:	审核:	比例: 1:1	ANGLE ±1°
日期版次	日期	日期: 2022/07/26	