

13790510059

5


4

3


2

6.40 ± 0.15


1.10 ± 0.08




a-a SECTION

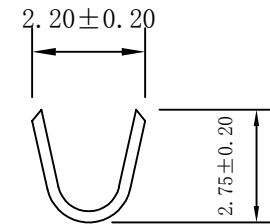

b-b SECTION

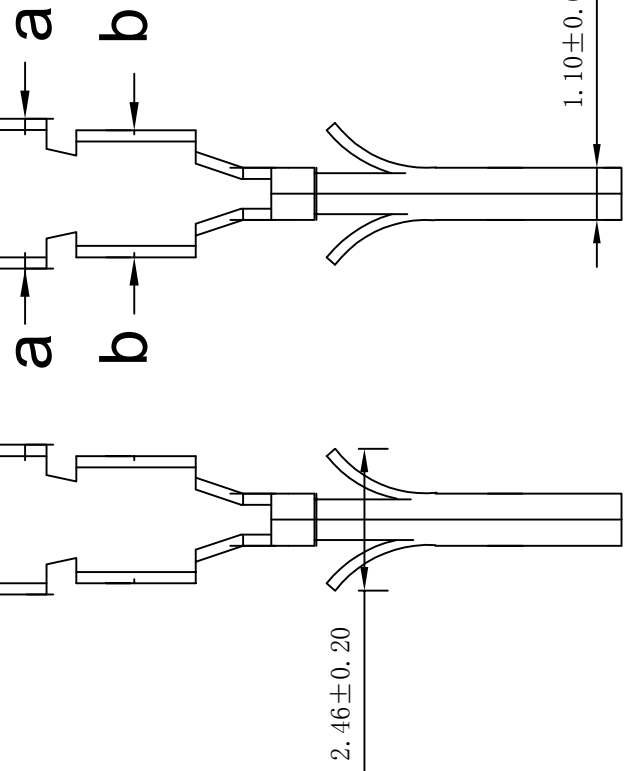

1.28 ± 0.10



c-c SECTION

0.20 ± 0.05

10.20 ± 0.30

EST3001 T P H - 2 X - G

- ↑ 渠道代码+间距
- ↑ T示意端子
- ↑ X普通脚  
H高脚  
E增高脚
- ↑ X普通  
L长  
S短
- ↑ X公端  
G母端  
C示意90°  
S示意180°

P磷铜  
B黄铜  
E合金铜

0素材  
2镀锡先冲后镀  
3镀锡先镀后冲  
5G、15G示意镀金5U"或15U"  
1G示意镀金1U"

Specifications :  
 Voltage rating: 250V AC / DC  
 Current rating: 5A Max AC / DC  
 Withstanding voltage: 1000V AC/minute  
 Temperature range: -25°C~+85°C  
 Insulation resistance: ≥1000MΩ  
 Contact resistance: ≤10mΩ  
 After environmental testing: ≤20mΩ  
 Material: C5191  
 Plating mating: tin/gold  
 Wire size awg:#18



东莞市羿通实业有限公司  
 DONGGUAN EASTOM ELECTRONIC Co., Ltd.


料号PART NO: EST3001TPH-2S-G

品名 TITLE: MX3.0-T母(短高)

一般公差  
 GENERAL TOLERANCE  
 X.X ±0.15  
 X.XX ±0.05  
 ANGLE ±1°

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY

材料: C5191	单位: MM	包装规格: 10K/卷	比例: 1:1
制图:	审核:	核准:	日期: 2022/07/26



EST