

13790510059



5

4



3

2

1

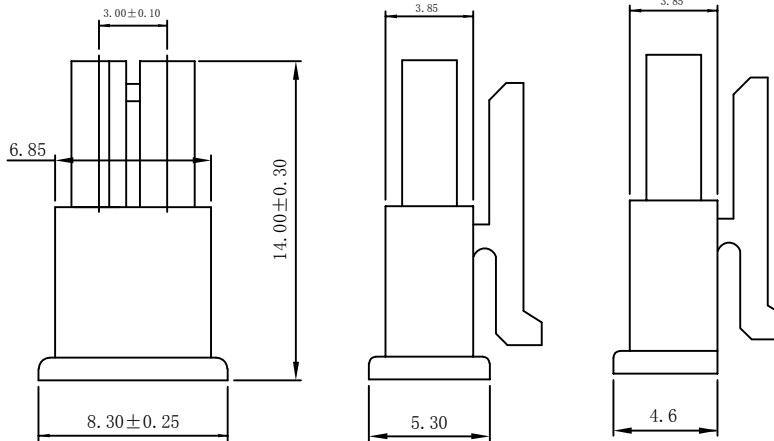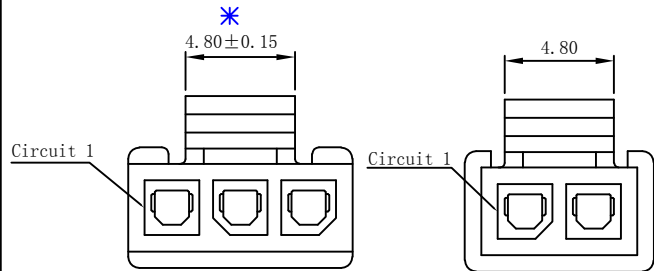


Poles	Dimensions (mm)	
	A	B
02	3.00	6.85
03	6.00	9.85
04	9.00	12.85
05	12.00	15.85
06	15.00	18.85
07	18.00	21.85
08	21.00	24.85
09	24.00	27.85
10	27.00	30.85
11	30.00	33.85
12	33.00	36.85

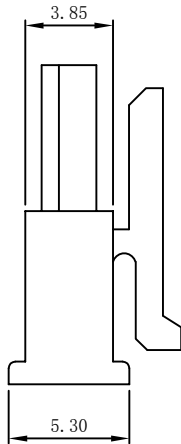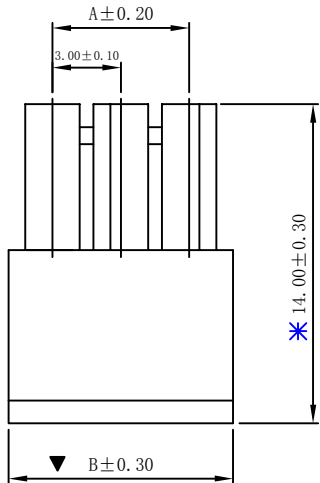


2P

3P-12P

2P



3D VIEW

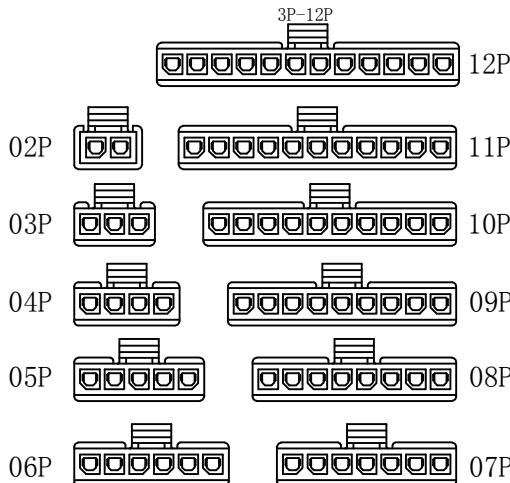

CIRCUIT SIZE LAYOUT

EST3001 H - 1\*NP B - B - NK - HF-X- X

↑ 羿通代码+间距  
 ↑ H示意胶壳, H后无数字默认材质V0, H后带数字2示意材质V2  
 ↑ 1示意单排, 2示意双排  
 ↑ PIN数  
 ↑ X本色, B黑色, R红色, L蓝色, Y黄色, G绿色  
 ↑ B带扣, C刺破, U超薄防呆型, LC带低凸点, K卡槽, E有耳  
 ↑ NO MARK  
 ↑ LOCK TYPE  
 ↑ F防呆型  
 ↑ X胶壳, G母胶壳  
 ↑ HF示意无卤, NF普通含卤  
 ↑ A灼热丝750, B灼热丝850, X普通料

■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 5A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C~+85° C

■ HOUSING

- Part No. :
- Poles : 02-12P
- Housing Material: PA66 UL94V-2 Black
- The Dimension Marked “\*” Must Testing

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY

**东莞市羿通实业有限公司**  
**DONGGUAN EASTOM ELECTRONIC Co., Ltd.**

料号PART NO: EST3001H-1*NPB-B			一般公差 GENERAL TOLERANCE
品名 TITLE: MX3.0-H公单			X.X ±0.30
材料:	单位: MM	包装规格:	X.XX ±0.25
比例: 1:1	日期: 2022.7.27	审核:	ANGLE ±1°

6

5

4

3

2

1

LS