




SECTION A-A

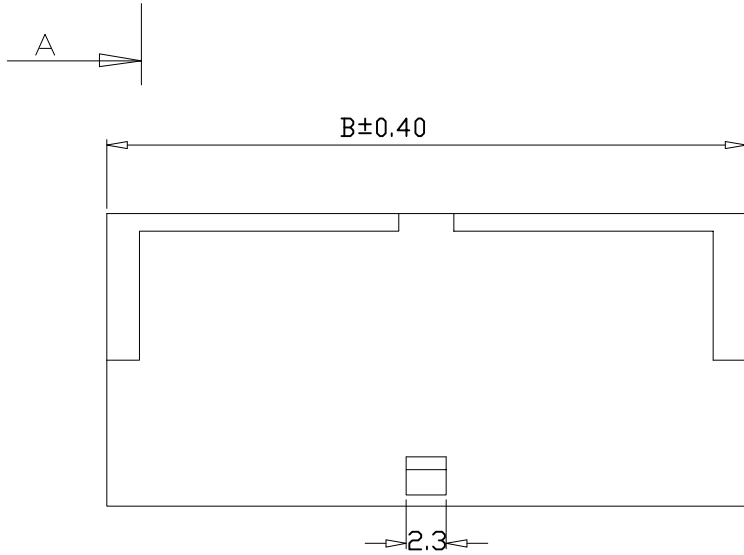

Model NO.	A	B
1*2P	3.0	7.0
1.3P	6.0	10.0
1*4P	9.0	13.0
1*5P	12.0	16.0
1*6P	15.0	19.0
1*7P	18.0	22.0
1*8P	21.0	25.0
1*9P	24.0	28.0
1*10P	27.0	31.0
1*11P	30.0	34.0
1*12P	33.0	37.0

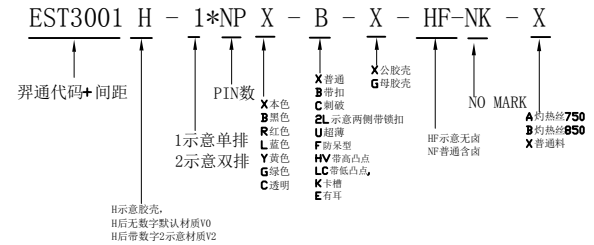

■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 5A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C~+85° C
- HOUSING
- Part No.:
- Poles : 02-12P
- Housing Material: PA66 UL94V-2 Black
- The Dimension Marked “ \* ” Must Testing

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY



东莞市羿通实业有限公司  
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST3001H-1\*NPB-X-G

品名 TITLE: MX3.0-H母(单排)

材料: pa66

单位: MM

包装规格: 1K/bag

比例: 1:1

制图:

审核:

核准:

日期: 2021/4/13

一般公差  
GENERAL TOLERANCE

X.X ±0.30  
X.XX ±0.20  
X.XXX ±0.10  
ANGLE ±1°

