
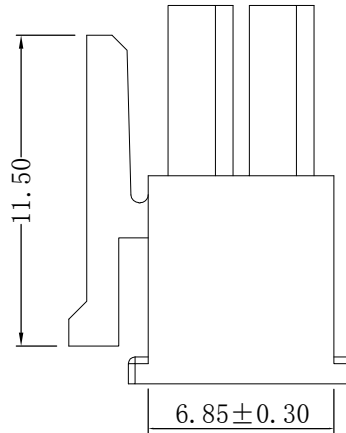


	P	A	B
2*1			3.85
2*2	3.00		6.85
2*3	6.00		9.85
2*4	9.00		12.85
2*5	12.00		15.85
2*6	15.00		18.85
2*7	18.00		21.85
2*8	21.00		24.85
2*9	24.00		27.85
2*10	27.00		30.85
2*11	30.00		33.85
2*12	33.00		36.85

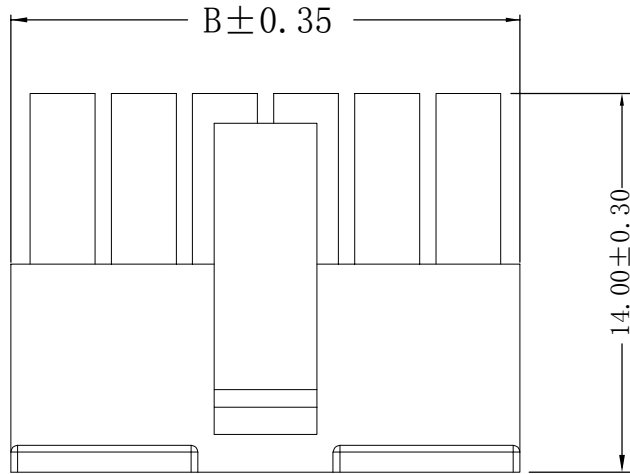


EST3001 H - 2*NP B - B - X - HF-NK - X

羿通代码+间距 1示意单排 2示意双排 PIN数 X本色 B黑色 R红色 L蓝色 Y黄色 G绿色 C透明
 H示意胶壳 H后无数字默认材质V0 H后带数字2示意材质V2 X公胶壳 G母胶壳 X示意无耳 B示意有耳 SO MARK A灼热丝750 B灼热丝850 X普通料

X普通 B带扣 C阻燃 2L示意两侧带锁扣 U超薄F防呆型 HV带高凸点 LC带低凸点 K卡槽 E有耳

- SPECIFICATIONS
- Voltage rating: 250V AC, DC
 - Current rating: 5A, AC, DC
 - Withstanding Voltage: 1500V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -25° C~+85° C
 - HOUSING
 - Part No. :
 - Poles : 02-12P

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY



东莞市羿通实业有限公司

DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST3001H-2*NPB-B-X

品名 TITLE: MX3.0-H公(双排)


材料:	单位: MM	包装规格:	比例: 1:1
制图:	审核:	核准:	日期: 2022.7.29

一般公差
GENERAL TOLERANCE


X.X ±0.30

X.XX ±0.20

ANGLE ±1°



EST

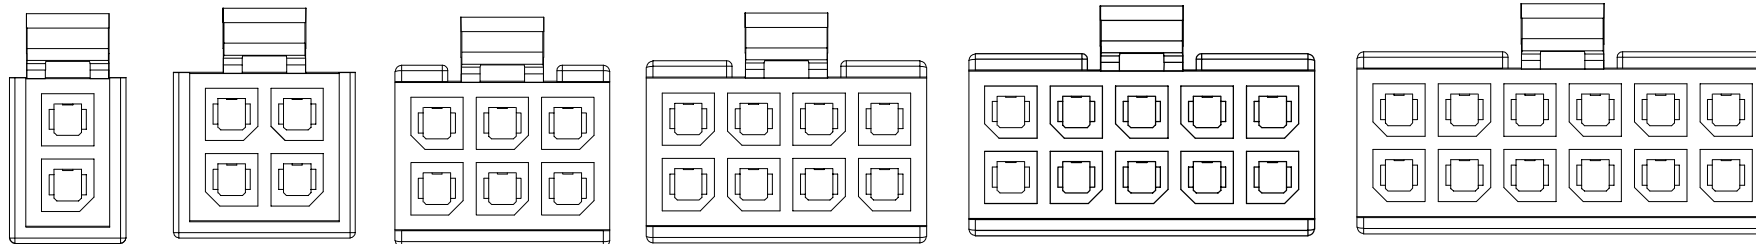

2*1P


2*2P

2*3P


2*4P

2*5P


2*6P

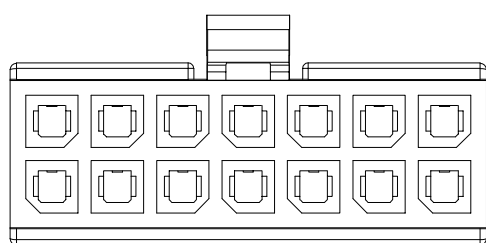


2*7P

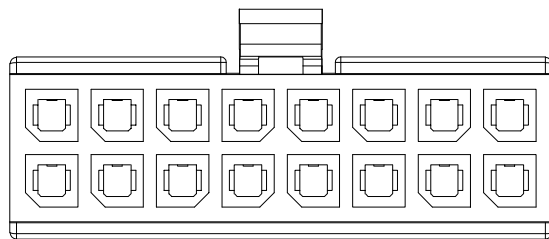


2*8P

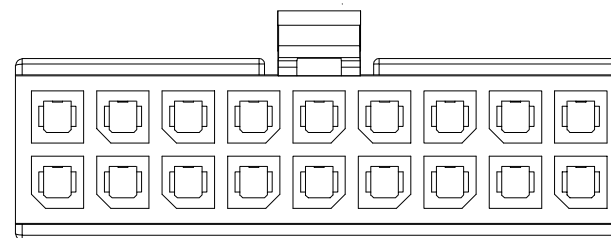


2*9P

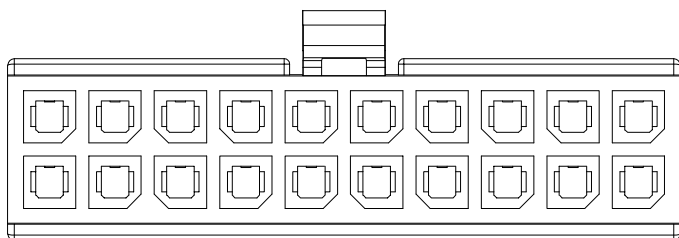

2*10P

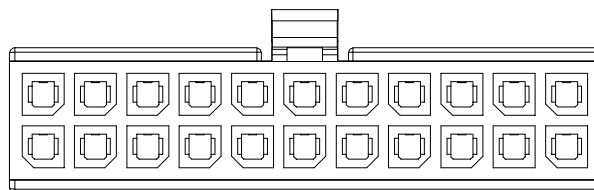

2*11P

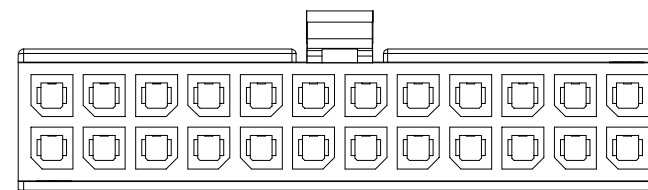

2*12P

■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 5A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C~+85° C
- HOUSING
- Part No. :
- Poles : 02-12P



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST3003H-2*NPB-B-X

品名 TITLE: MX3.0-H公 (双排)

材料:	单位: MM	包装规格:	比例: 1:1
制图:	审核:	核准:	日期: 2022/7/29

一般公差
GENERAL TOLERANCE
X.X ±0.30
X.XX ±0.20
ANGLE ±1°

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY

