


13790510059

5

4

3

2

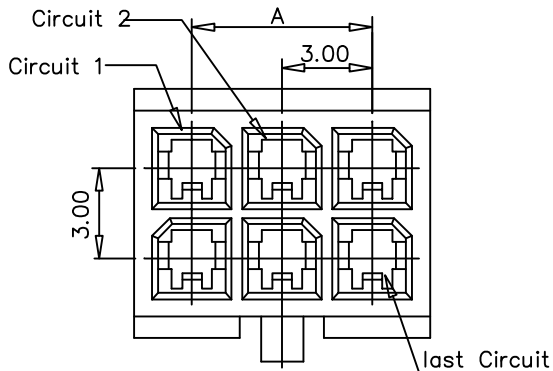

EST3001 H - 2*NP B - B - G - HF-NK - X

羿通代码+间距

PIN数
1示意单排
2示意双排

X 本色
B 黑色
R 红色
L 蓝色
Y 黄色
G 绿色
C 透明

普通
带扣
刺破
2L 示意两侧带锁扣
U 超薄防架型
HV 带高凸点,
LC 带低凸点,
K 卡槽
E 有耳



X 公胶壳
G 母胶壳

NO MARK

HF 示意无齿
NF 普通含齿

A 灼热丝750
B 灼热丝850
X 普通料

H 示意胶壳,
H 后无数字默认材质V0
H 后带数字2示意材质V2

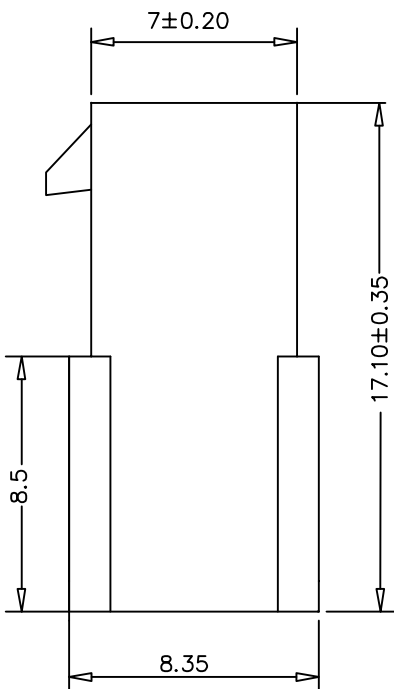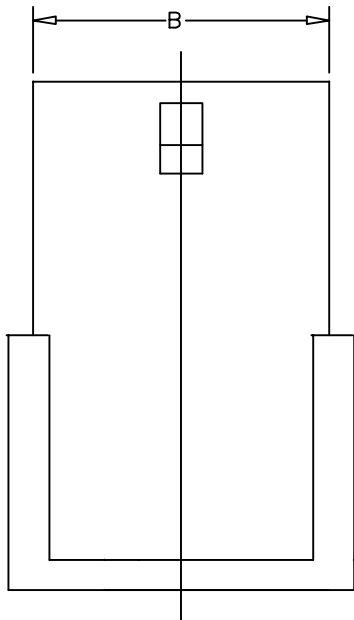

PART NO	Dimensions		TOLERANCE
	A	B	
2X01P	---	3.85	+0.30 -0.25
2X02P	3.00	6.85	+0.30 -0.25
2X03P	6.00	9.85	+0.30 -0.25
2X04P	9.00	12.85	+0.55 -0.25
2X05P	12.00	15.85	+0.55 -0.25
2X06P	15.00	18.85	+0.55 -0.25
2X07P	18.00	21.85	+0.55 -0.25
2X08P	21.00	24.85	+0.55 -0.25
2X09P	24.00	27.85	+0.55 -0.25
2X10P	27.00	30.85	+0.55 -0.25
2X11P	30.00	33.85	+0.55 -0.25
2X12P	33.00	36.85	+0.55 -0.25

SPECIFICATIONS

- Voltage rating: 250V DC/AC (rms)
- Current rating: 5A AC DC(rms)
- Withstand voltage: 1500V AC(rms)
- Working Temperature: -25°C+85°C
- Insulation resistance: ≥1000MΩ
- Contact resistance: ≤0.01Ω
- UL File No: E304945
- Material: Nylon66 UL94V-2

东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST3001H-2*NPX-B-G			一般公差 GENERAL TOLERANCE X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 ANGLE ±1°
品名 TITLE: MX3.0-H母双			
材料: PA66	单位: MM	包装规格:	比例: 1:1
日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	日期: 2022/07/29
核 准 APPROVALBY	制图: LI	审 核: LI	核 准: LI

6

5

4

3

2

1

HR