

EST3001 W VS - 2\*NP X -X - X X - NK-HF

↑ 羿通代码+间距      ↑ PIN数 X本色 X普通  
 1单排 B黑色 B带扣  
 2双排 R红色 U超薄  
 L蓝色 PH组合排针  
 Y黄色 FH组合排母  
 G绿色 H高弯  
 K打脚K  
 V示意180°直针, VS立式  
 R示意90°弯针,  
 RS卧式  
 RG高弯  
 2示意有柱  
 LO带定位无K  
 KLO带定位打K

↑ G为PIN针镀金 S为PIN针镀锡  
 1为PPS,  
 2为PBT,  
 3为LCP,  
 4为ABS,  
 5为PA6T,  
 6为PA66

↑ HF无卤 NF普通含卤  
 NK为NO MARK  
 MK为有MARK

W示意针座  
 W后无0默认材质为V0  
 W后带2示意V2

- SPECIFICATIONS**
- Voltage rating:250V AC/DC;
  - Current rating:5A AC/DC;
  - Withstanding Voltage:1500V AC/minute
  - Insulation resistance:1000MΩ Min
  - Temperature range:-25℃ ~+85℃
  - Contact resistance:10mΩ Max

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY


**东莞市羿通实业有限公司**  
**DONGGUAN EASTOM ELECTRONIC Co., Ltd.**

料号PART NO: EST3001VS-2\*NPB-B


品名 TITLE: MX3.0立贴双排

材料:	单位: <b>MM</b>	包装规格:	比例: <b>1:1</b>
制图:	审核:	核准:	日期: <b>2022.07.29</b>


一般公差  
**GENERAL TOLERANCE**  
 X.X ±0.25  
 X.XX ±0.20  
 ANGLE ±1°




2\*1P




2\*2P




2\*3P




2\*4P




2\*5P

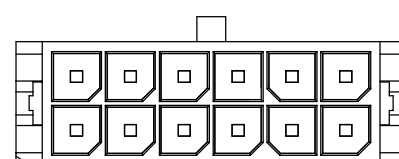


2\*6P

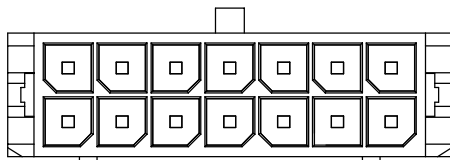


2\*7P

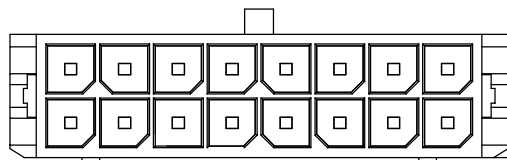


2\*8P

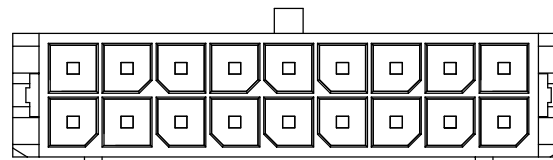


2\*9P

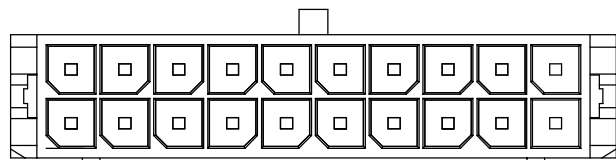

2\*10P

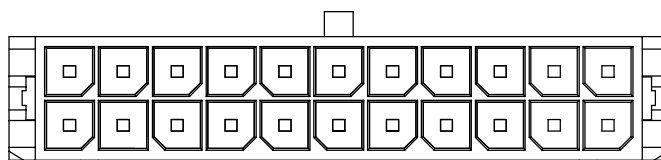

2\*11P

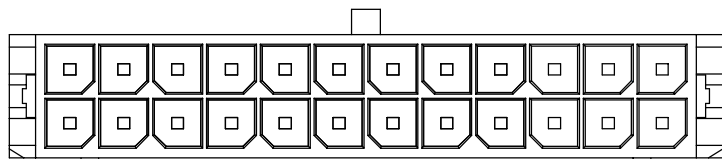

2\*12P

SPECIFICATIONS

- Voltage rating:250V AC/DC;
- Current rating:5A AC/DC;
- Withstanding Voltage:1500V AC/minute
- Insulation resistance:1000MΩ Min
- Temperature range:-25℃ ~+85℃
- Contact resistance:10mΩ Max



东莞市羿通实业有限公司  
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST3001VS-2\*NPB-B

品名 TITLE: MX3.0立贴双排

材料:

单位: MM

包装规格:

比例: 1:1

一般公差  
GENERAL TOLERANCE  
X.X ±0.25  
X.XX ±0.20  
ANGLE ±1°

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY

制图:

审核:

核准:

日期: 2022.07.29

