





技术参数: SPECIFICATIONS



- 适用线规: AWG#28~#32
Applicable wire: AWG#28~#32
- 额定电压: 250V DC/AC (有效值)
Voltage rating: 250V DC/AC (rms)
- 额定电流: 1.0A
Current rating: 1.0A
- 耐压值: 800V AC(有效值)
Withstand voltage: 800V AC(rms)
- 工作温度: -25℃~+85℃
Working Temperature: -25℃+85℃
- 绝缘电阻: $\geq 1000M\Omega$
Insulation resistance: $\geq 1000M\Omega$
- 接触电阻: $\leq 0.02\Omega$
Contact resistance: $\leq 0.02\Omega$

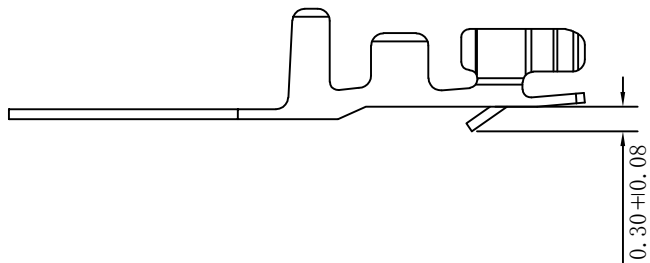

A-A SECTION



B-B SECTION

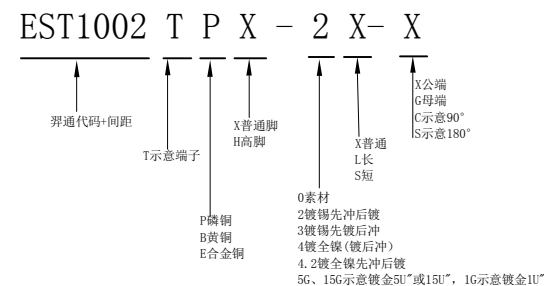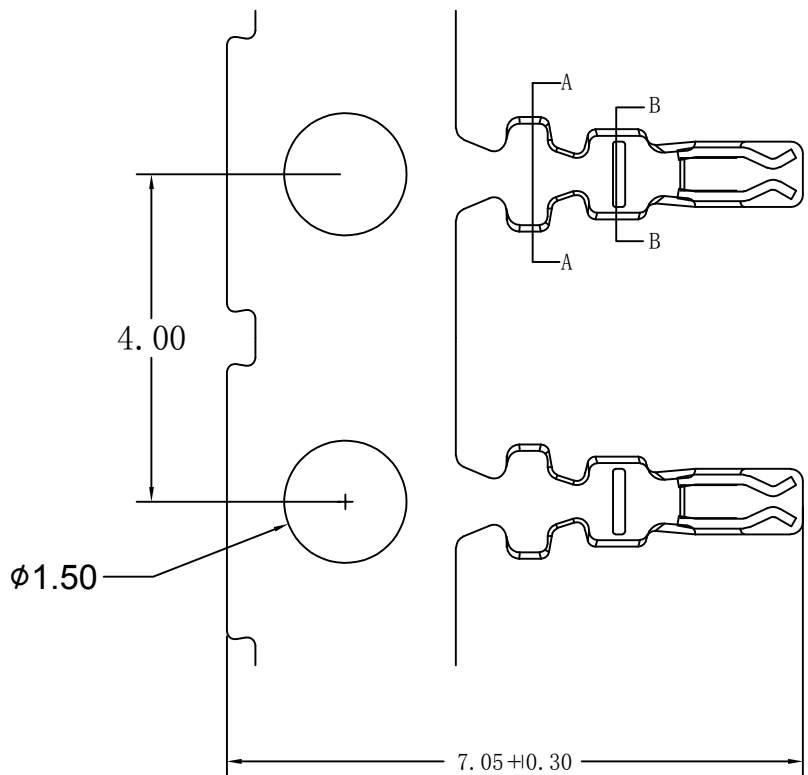

东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST1002TPX-2X-G

品名 TITLE: CI14-T

材料: C5191 单位: MM 包装规格: 20K/卷 比例: 1:1
 制图: 审核: 核准: 日期: 2022. 4. 13

一般公差
GENERAL TOLERANCE
 X.X ±0.15
 X.XX ±0.05
 ANGLE ±1°

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY

