

13790510059







5

4

3

2

1

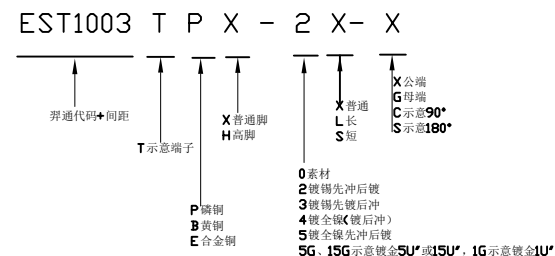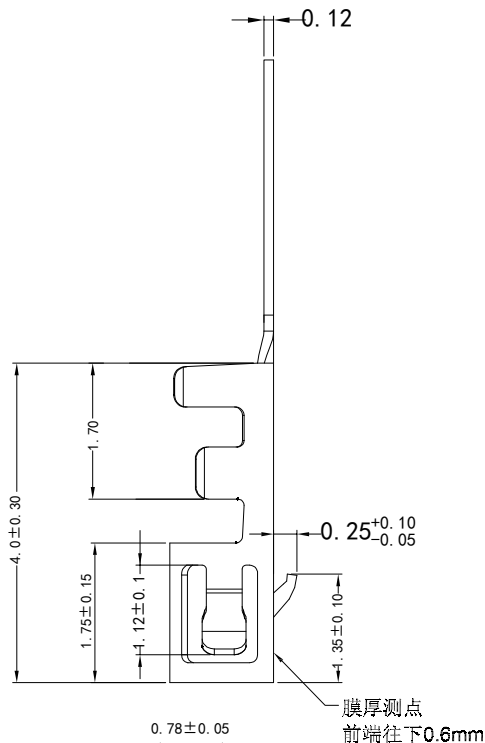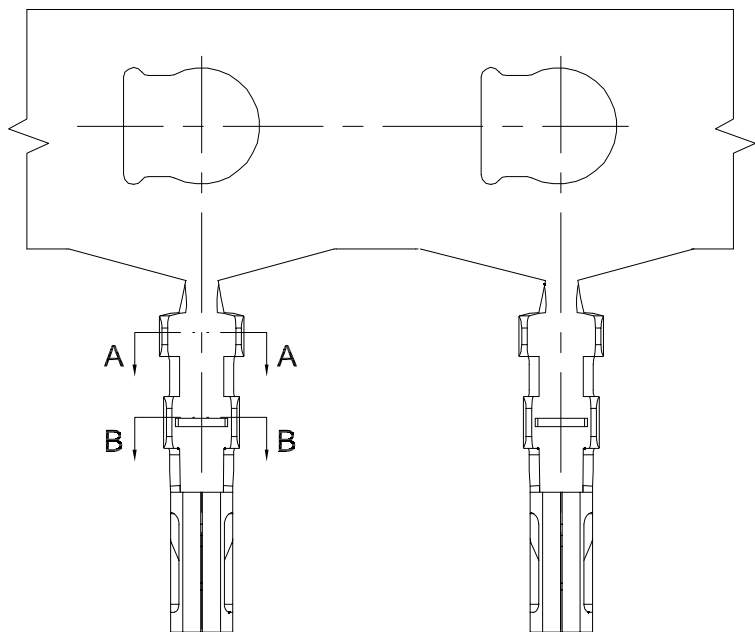

■ SPECIFICATIONS

- Voltage rating: 50V AC/DC;
- Current rating: 1A AC/DC;
- Withstanding Voltage: 250V AC/minute
- Insulation resistance: 100MΩ Min
- Temperature range: -40°C ~ +85°C
- Contact resistance: 20mΩ Max
- Material: C5191
- Wire Range: #28~#32
- Insulation O. D. : 0.8mm (Max)



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.


料号 PART NO: EST1003TPX-2X-G

品名 TITLE: 1003-T

一般公差
GENERAL TOLERANCE
X.X ±0.25
X.XX ±0.20
ANGLE ±1°

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVAL BY

材料:	单位: MM	包装规格:	比例: 1:1
制图:	审核:	核准:	日期: 2022. 3. 18



6

5

4

3

2

1

SL