

13790510059






5

4

3

2

1

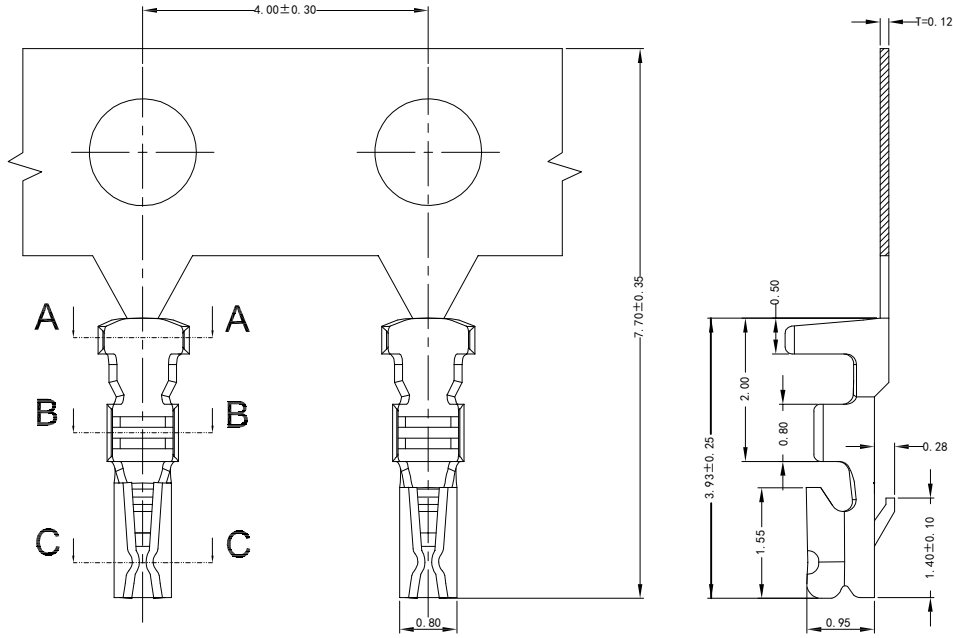

- Specifications :
- Voltage rating: 125V AC / DC
 - Current rating: 1A AC / DC
 - Withstanding voltage: 500V AC/minute
 - Temperature range: -25°C~+85°C
 - Insulation resistance: $\geq 100M\Omega$
 - Contact resistance: $\leq 20m\Omega$
 - After environmental testing: $\leq 40m\Omega$
 - AWG: #28-#32

EST1009 T P X - 2 X - X

↑ 弄通代码+间距

↑ T 示意端子

↑ X 普通脚

↑ H 高脚

↑ P 磷铜
↑ B 黄铜
↑ E 合金铜

↑ 0 素材
 ↑ 2 镀锡先冲后镀
 ↑ 3 镀锡先镀后冲
 ↑ 4 镀全银(镀后冲)
 ↑ 4.2 镀全银先冲后镀
 ↑ 5G、15G 示意镀金5U*或15U*、1G 示意镀金1U*

↑ X 公端
↑ G 母端
↑ C 示意90°
↑ S 示意180°

13790510059

5

4

3

2

1



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST1009TPX-2X-G

品名 TITLE: 1002-T

材料: PA66

单位: MM

包装规格: 1K/包

比例: 1:1

制图:

审核:

核准:

日期: 2021.10.25


日期版次
REVISION

日期
DATE

变更内容
DESCRIPTION

核 准
APPROVALBY

一般公差
GENERAL TOLERANCE
 X.X ±0.15
 X.XX ±0.10
 ANGLE ±1°



SL