

5 4 3 2

F

E

D

C

B

A

F



E

D




C

B

A

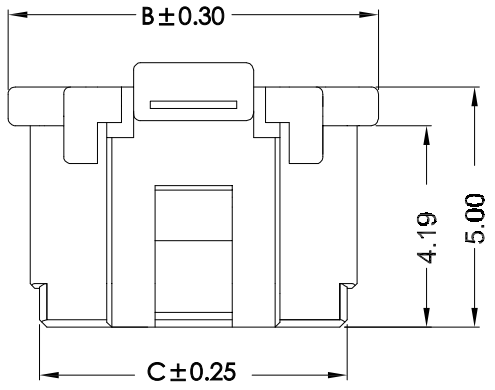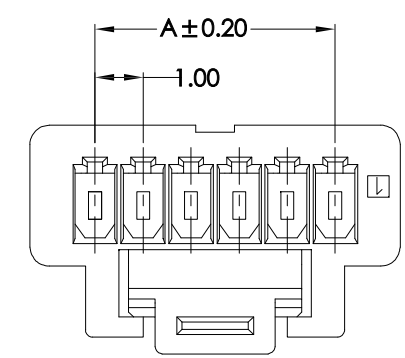

6P~15P With Lock

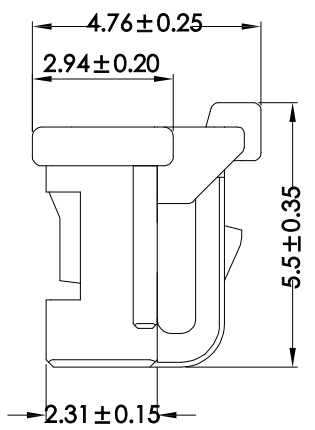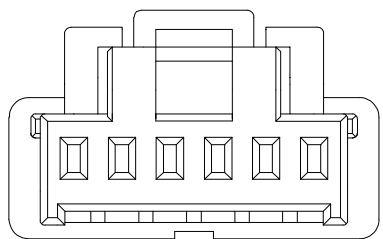

2P~5P Without Lock

EST1010 H - 1*NP X - B - NK - HF - X

↑ 羿通代码+间距

↑ PIN数
1示意单排
2示意双排

↑ X本色
B黑色
R红色
L蓝色
Y黄色
G绿色

↑ X普通
B带扣
C刺破
L示意LOCK TYPE
U超薄

↑ NO MARK

↑ HF示意无卤

↑ X公胶壳
G母胶壳

H示意胶壳,
H后无数字默认材质V0
H后带数字2示意材质V2

技术参数: SPECIFICATIONS

- 额定电压: 50V DC/AC (有效值)
Voltage rating: 50V DC/AC (rms)
- 额定电流: 1.0A
Current rating: 1.0A
- 耐压值: 250V AC(有效值)
Withstand voltage: 250V AC(rms)
- 工作温度: -25℃~+85℃
Working Temperature: -25℃+85℃
- 绝缘电阻: ≥100MΩ
Insulation resistance: ≥100MΩ
- 接触电阻: ≤0.02Ω
Contact resistance: ≤0.02Ω

Poles	Dimensions (mm)			Poles	Dimensions (mm)		
	A	B Δ	C		A	B	C
02	1.00	3.70	2.40	09	8.00	10.70	9.40
03	2.00	4.70	3.40	10	9.00	11.70	10.40
04	3.00	5.70	4.40	11	10.00	12.70	11.40
05	4.00	6.70	5.40	12	11.00	13.70	12.40
06	5.00	7.70	6.40	13	12.00	14.70	13.40
07	6.00	8.70	7.40	14	13.00	15.70	14.40
08	7.00	9.70	8.40	15	14.00	16.70	15.40

TELL: 13790510059
Address: 1/2 WORKSHOP BUILDING NO.53 LONGYAN NINTH ROAD, HUMEI TOWN
DONGGUAN GUANGDONG CHINA

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY

东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST1010H-1*NPX-B

品名 TITLE: **1004-H**

材料: PA66	单位: MM	包装规格: 1K/包	比例: 1:1
制图:	审核:	核准:	日期: 2022/2/22

一般公差
GENERAL TOLERANCE

X, X ±0.30

X, XX ±0.20

ANGLE ±1°

6 5 4 3 2 1 SL