

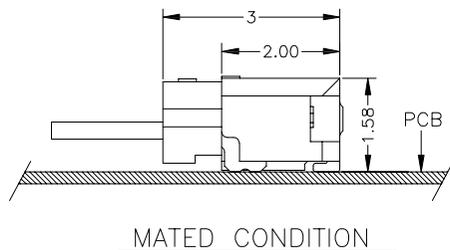
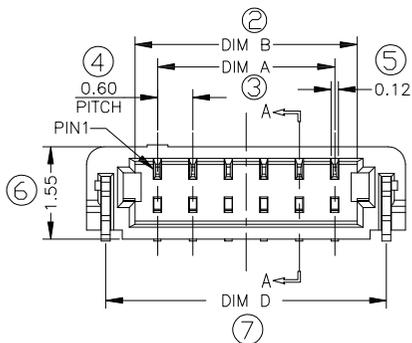



RECOMMENDED PCB LAYOUT  
DEFAULT TOL:±0.05



MATED CONDITION

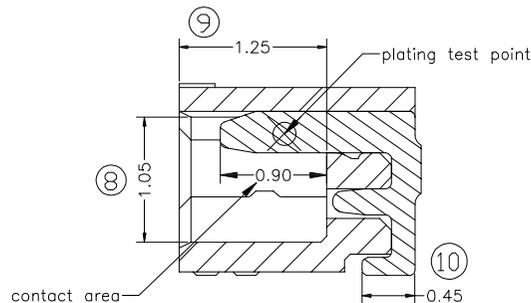

SECTION A-A  
SCALE 2:1

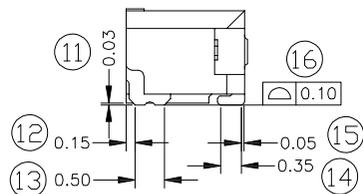

EST0600 W RS - 1\*NP X - X - XG - NK-HF

↑  
界通代码+间距

PIN数

X本色

B黑色

R红色

L蓝色

Y黄色

G绿色

1单排

2双排

X普通

B带扣

U超薄

PH组合排针

FH组合排母

H高弯

P平弯

XG中的X示意尼龙料,

1为PPS,2为PBT,3为LCP,4为ABS,5为PA6T,

6为PA66

NK为有MARK

HF无卤

NF普通含卤

↑  
NK为有MARK

↑  
HF无卤

↑  
NF普通含卤

V示意180°直针, VS立式

R示意90°弯针, RS卧式

W示意针座

W后无0默认材质为V0

W后带2示意V2

G示意PIN针镀金,S为PIN针镀锡

CKT.	Dim A	Dim B	Dim C	Dim D
2	0.60	1.36	3.00	2.35
4	1.80	2.56	4.20	3.55
5	2.40	3.16	4.80	4.15
6	3.00	3.76	5.40	4.75
7	3.60	4.36	6.00	5.35
8	4.20	4.96	6.60	5.95
10	5.40	6.16	7.80	7.15
12	6.60	7.36	9.00	8.35
14	7.80	8.56	10.20	9.55
16	9.00	9.76	11.40	10.75

NOTES:

1.MATERIAL:

Housing: ThermalPlastic ,High Temp,(UL94V-0 )

Contact:Copper Alloy

Nail:Brass

2.FINISH:

Contact:

50u"Min,NICKEL UNDERPLATING OVERALL.

1.GOLD FLASH PLATING OVERALL.

2.100u" MIN.MATT TIN OVERALL.

Nail:

50u"MIN,NICKEL UNDERPLATING OVERALL.

100u" MIN,MATT TIN OVERALL.



东莞市羿通实业有限公司  
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO:EST0600WRS-1\*NPX-X

品名 TITLE:0.6刺破(卧式)

材料:

单位: MM

包装规格:

比例: 1:1

制图:


审核:

核准:

日期:

2022. 1. 12

一般公差  
GENERAL TOLERANCE  
X.X ±0.25  
X.XX ±0.20  
ANGLE ±1°



日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY