

13790510059






5

4

3

2

1

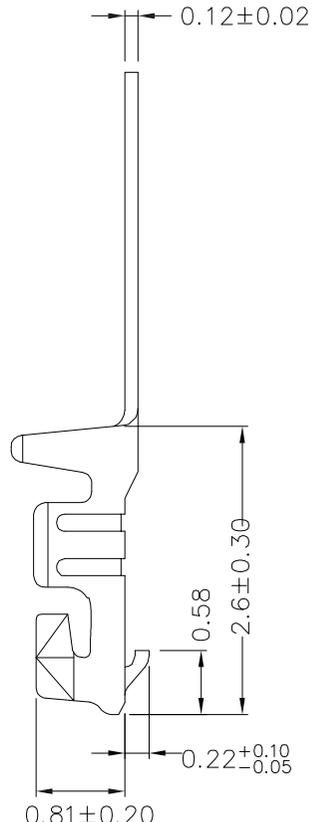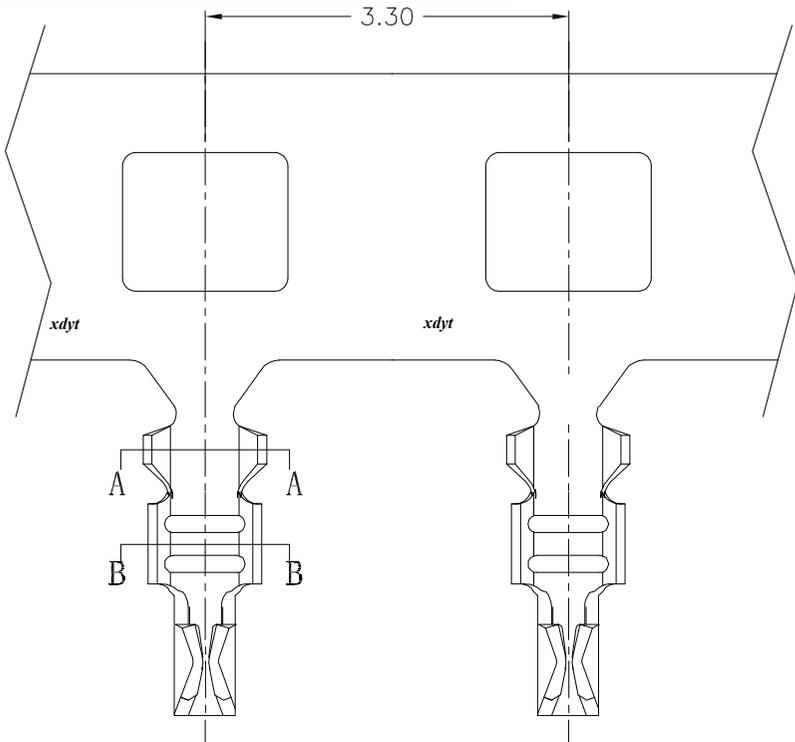

EST0801 T B X - 2 X - X

↑ 羿通代码+间距 ↑ T 示意端子 ↑ X 普通脚 ↑ H 高脚 ↑ E 增高脚 ↑ P 磷铜 ↑ B 黄铜 ↑ E 合金铜 ↑ 0 素材 ↑ 2 镀锡先冲后镀 ↑ 3 镀锡先镀后冲 ↑ 4 镀全镍(镀后冲) ↑ 4.2 镀全镍先冲后镀 ↑ 5G、15G 示意镀金5U*或15U*、1G 示意镀金1U*

X 公端
L 长
S 短
G 母端
C 示意90°
S 示意180°

- SPECIFICATIONS**
- Voltage rating: 100V AC/DC;
 - Current rating: 1A AC/DC;
 - Withstanding Voltage: 500V AC/minute
 - Insulation resistance: 500MΩ Min
 - Temperature range: -25℃~+85℃
 - Contact resistance: 10mΩ Max
 - Applicable wires: AWG32-#34; OD: 0.6mm Max

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVAL BY

EST
DGEASTOM

东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST0801HTBH-2X-G

品名 TITLE: 0.8-T增高

材料: 单位: **MM** 包装规格: 比例: **1:1**

制图: 审核: 核准: 日期: **2022. 7. 12**

一般公差
GENERAL TOLERANCE
X.X ±0.30
X.XX ±0.25
ANGLE ±1°

XDYT

6

5

4

3

2

1

XDYT