



P NO.	Dimensions	
	A	B
2P	1.25	4.25
3P	2.50	5.50
4P	3.75	6.75
5P	5.00	8.00
6P	6.25	9.25
7P	7.50	10.50
8P	8.75	11.75
9P	10.00	13.00
10P	11.25	14.25
11P	12.50	15.50
12P	13.75	16.75
13P	15.00	18.00
14P	16.25	19.25
15P	17.50	20.50
16P	18.75	21.75

- Applicable Wire Range: AWG#28~#32
- Insulation O.D.: 0.80mm (Max.)
- Current Rating: 2A AC,DC
- Voltage Rating: 125V AC,DC
- Temperature Rang: -25°C~+85°C
- Contact Resistance: 20mΩ Max
- Insulation Resistance: 100MΩ Min
- Withstanding Voltage: 500V AC/minute

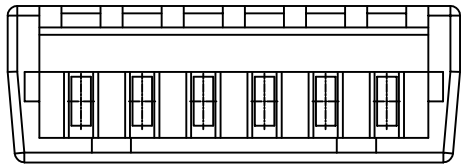

EST1250 H - 1*NP X - B - NK - HF-X

↑ 羿通代码+间距 ↑ PIN数 ↑ X本色
 ↑ H示意胶壳, H后无数字默认材质V0, H后带数字2示意材质V2 1示意单排, 2示意双排 X黑色
 ↑ X普通 NO MARK ↑ X公胶壳 L蓝色 U超薄 G母胶壳

↑ HF示意无卤 NF普通含卤

EST 东莞市羿通实业有限公司
DGEASTOM DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST1250H-1*NPX-X		一般公差 GENERAL TOLERANCE	
品名 TITLE: MX1.25-H		X.X ±0.30	
材料: PA66 94-V0	单位: MM	包装规格: 1K/包	X.XX ±0.25
制图:	审核:	核准:	X.XXX ±0.15
日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核准 APPROVALBY
比例: 1:1		日期: 2020/04/22	ANGLE ±5°