
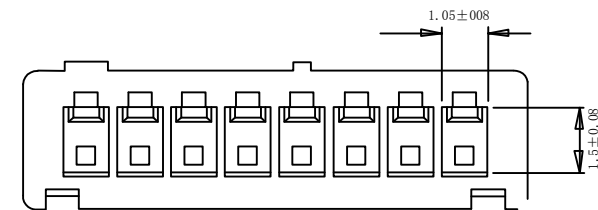


Circuit 1

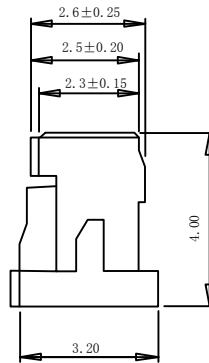

PIN数	A	B	C
02	1.25	4.15	3.05
03	2.50	5.40	4.30
04	3.75	6.65	5.55
05	5.00	7.90	6.80
06	6.25	9.15	8.05
07	7.50	10.40	9.30
08	8.75	11.65	10.55
09	10.00	12.90	11.80
10	11.25	14.15	13.05
11	12.50	15.40	14.30
12	13.75	16.65	15.55
13	15.00	17.90	16.80
14	16.25	19.15	18.00
15	17.50	20.40	19.30

EST1252 H - 1*NP X - B - X - HF-NK - X

↑ 羿通代码+间距 ↑ PIN数 ↑ X本色
 ↑ B黑色 ↑ X普通 ↑ X公胶壳
 ↑ R红色 ↑ B带扣 ↑ G母胶壳
 ↑ L蓝色 ↑ C刺破 ↑ L示意LOCK TYPE
 ↑ Y黄色 ↑ U超薄P防呆型 ↑ HV带高凸点
 ↑ G绿色 ↑ LC带低凸点 ↑ K卡槽
 ↑ C透明 ↑ E有耳 ↑ NE无耳

↑ NO MARK ↑ HF示意无卤 ↑ NF普通含卤

↑ A灼热丝750 ↑ B灼热丝850 ↑ X普通料

H示意胶壳,
 H后无数字默认材质V0
 H后带数字2示意材质V2

- NOTES:
1. Material:Nylon66, UL94V-0
 2. Color:
 3. Corrent Roting:1A AC,DC
 4. Voltage rating:150V AC,DC
 5. Temperature Rang:-25° c~+85° c
 6. Contoct Resistance:30mΩ Min
 7. Insulation Resistance:500MΩ Min
 8. Withstanding Voltage:500V AC/minute
 9. APPLICABLE WIRE:AWG#28~#32



东莞市羿通实业有限公司
 DONGGUAN EASTOM ELECTRONIC Co., Ltd.


料号PART NO: EST1252H-1*NPX-X-X

品名 TITLE: DF13-H(单排)

材料: 单位: MM 包装规格: 比例: 1:1

制图: 审核: 核准: 日期: 2021.11.30

一般公差
 GENERAL TOLERANCE
 X.X ±0.25
 X.XX ±0.20
 ANGLE ±1°



日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY

6

5

4

3

2

1

XP