

F





E

D

C

B

A

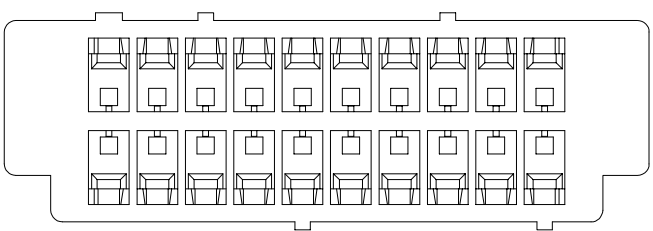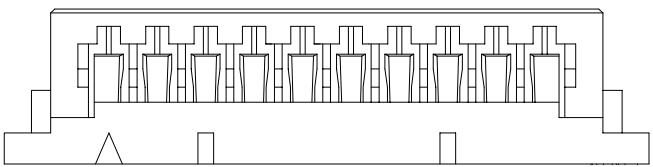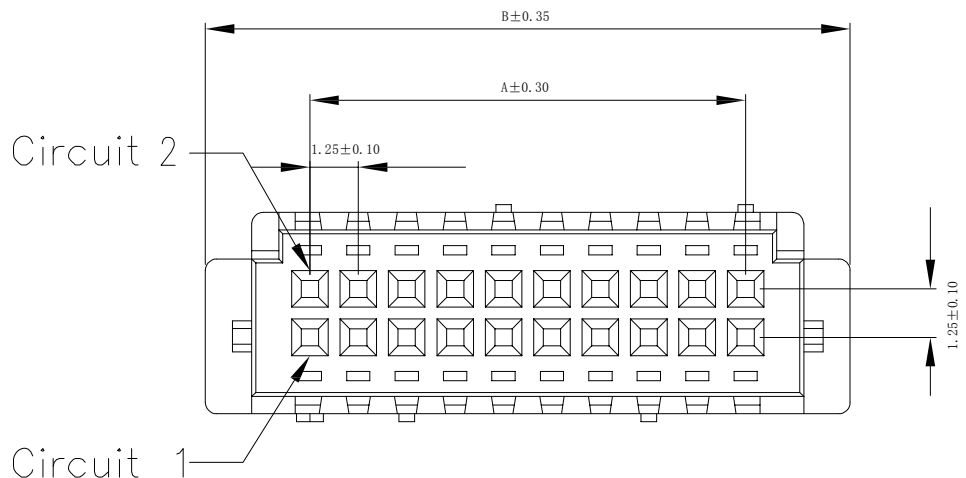

PIN	DIM. (mm)	
	A	B
2x05	5.00	10.40
2x06	6.25	11.65
2x07	7.50	12.90
2x10	11.25	16.65
2x15	17.50	22.90
2x17	20.00	25.40
2x18	21.25	26.65
2x20	23.75	29.15
2x21	25.00	30.40
2x25	30.00	35.40

EST1252 H - 1\*NP X - B - X - HF-NK - X

↑ 羿通代码+间距      ↑ PIN数      ↑ X本色      ↑ X公胶壳      ↑ NO MARK      ↑ A灼热丝750

↑ 1示意单排      ↑ B黑色      ↑ B带扣      ↑ G母胶壳      ↑ B灼热丝850

↑ 2示意双排      ↑ R红色      ↑ C刺破      ↑ L示意LOCK TYPE      ↑ X普通料


↑ H示意胶壳,      ↑ L蓝色      ↑ U超薄P防呆型      ↑ HV带高凸点      ↑ HF示意无卤      ↑ B灼热丝850

↑ H后无数字默认材质V0      ↑ Y黄色      ↑ LC带低凸点      ↑ K卡槽      ↑ NF普通含卤      ↑ X普通料

↑ H后带数字2示意材质V2      ↑ C绿色      ↑ E有耳      ↑ NE无耳

- NOTES:
1. Material: Nylon66, UL94V-0
  2. Color:
  3. Corrent Roting: 1A AC, DC
  4. Voltage rating: 150V AC, DC
  5. Temperature Rang: -25° c ~ +85° c
  6. Contoct Resistance: 30mΩ Min
  7. Insulation Resistance: 500MΩ Min
  8. Withstanding Voltage: 500V AC/minute
  9. APPLICABLE WIRE: AWG#28~#32

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY



## 东莞市羿通实业有限公司

DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST1252H-2\*NPX-X-X

品名 TITLE: DF13-H (双排)

材料:	单位: MM	包装规格:	比例: 1:1	一般公差 GENERAL TOLERANCE X.X ±0.25 X.XX ±0.20 ANGLE ±1°
制图:	审核:	核准:	日期: 2021.11.30	

6

5

4

3

2

1

XP