

13790510059






5

4

3

2

1

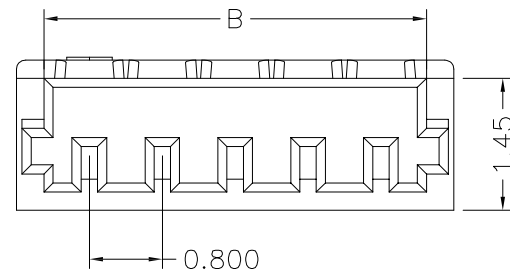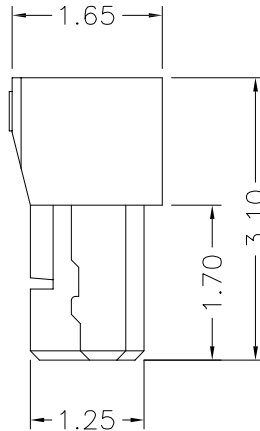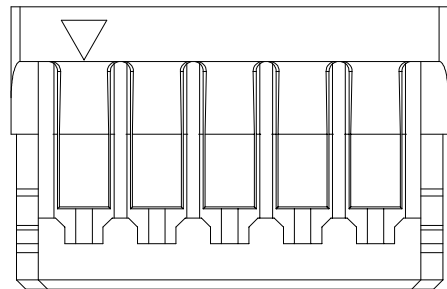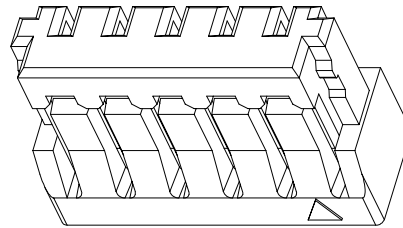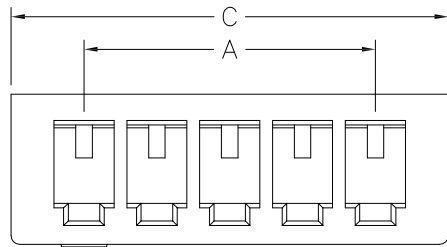

Poles	Dimensions		
	A	B	C
02P	0.80	1.80	2.40
03P	1.60	2.60	3.20
04P	2.40	3.40	4.00
05P	3.20	4.20	4.80
06P	4.00	5.00	5.60
07P	4.80	5.80	6.40
08P	5.60	6.60	7.20
09P	6.40	7.40	8.00
10P	7.20	8.20	8.80
11P	8.00	9.00	9.60
12P	8.80	9.80	10.40
13P	9.60	10.60	11.20
14P	10.40	11.40	12.00
15P	11.20	12.20	12.80
16P	12.00	13.00	13.60
17P	12.80	13.80	14.40
18P	13.60	14.60	15.20
19P	14.40	15.40	16.00
20P	15.20	16.20	16.80

EST0802 H - 1\*NP X - B - X - HF-NK - X

↑ 羿通代码+间距      ↑ PIN数      ↑ X本色  
 ↑ X普通      ↑ X公胶壳      ↑ B黑色  
 ↑ B带扣      ↑ G母胶壳      ↑ R红色  
 ↑ C刺破      ↑ L示意LOCK TYPE      ↑ L蓝色  
 ↑ U超薄防呆型      ↑ HV带高凸点      ↑ Y黄色  
 ↑ L C带低凸点,      ↑ K卡槽      ↑ G绿色  
 ↑ E有耳      ↑ NE无耳

HF示意无齿      NO MARK      A灼热丝750  
 NF普通含齿      B灼热丝850  
 X普通料

H示意胶壳,      H后无数字默认材质V0  
 H后带数字2示意材质V2

1示意单排      2示意双排

0.80mm Pitch wire to board connectors

■ SPECIFICATIONS

- Voltage rating: 30V AC/DC
- Current rating: 0.5A AC/DC
- Withstanding Voltage: 200V AC/minute
- Insulation resistance: 100MΩ Min.
- Temperature range: -25° C - +85° C
- Contact resistance: 20mΩ Max.

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY



东莞市羿通实业有限公司  
 DONGGUAN EASTOM ELECTRONIC Co., Ltd.


料号PART NO: EST0802H-1\*NPX-NE-X

品名 TITLE: 0.8-H2(无耳)

材料:      单位: MM      包装规格:      比例: 1:1

制图:      审核:      核准:      日期: 2021.10.28

一般公差 GENERAL TOLERANCE	
X.X	±0.35
X.XX	±0.20
ANGLE	±1°



XDYT