
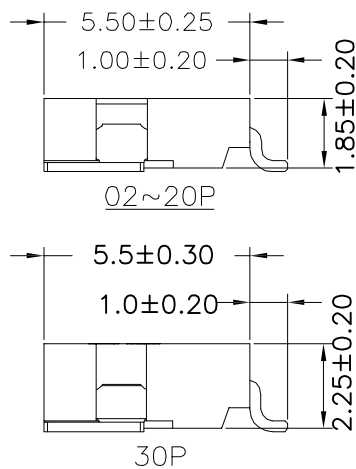


Ordering Information & Dimensions

PART NO.	Dimensions		
	A	B	C
02P	1.25	7.65	7.77
03P	2.50	8.90	9.02
04P	3.75	10.15	10.27
05P	5.00	11.40	11.52
06P	6.25	12.65	12.77
07P	7.50	13.90	14.02
08P	8.75	15.15	15.27
09P	10.00	16.40	16.52
10P	11.25	17.65	17.77
11P	12.50	18.90	19.02
12P	13.75	20.15	20.27
14P	16.25	22.65	22.77
15P	17.50	23.90	24.02
16P	18.75	25.15	25.27
20P	23.75	30.15	30.27
30P	36.25	42.65	42.77

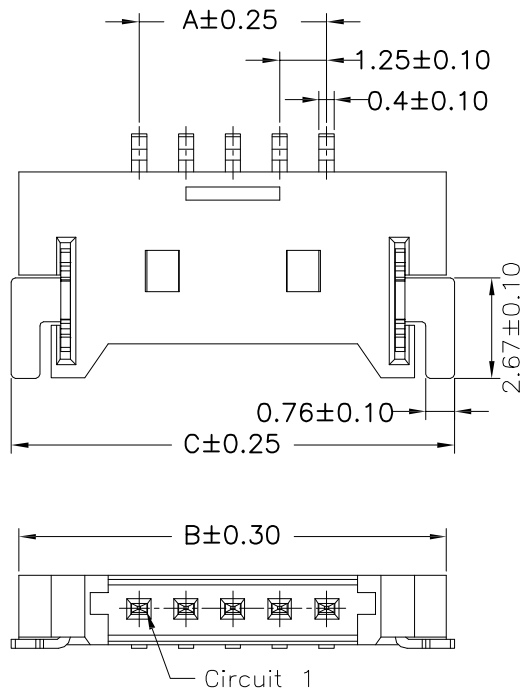

EST1255 W RS - 1*NP X - X - XG - NK-HF

羿通代码+间距 PIN数 X本色 X普通 XG中的X示意尼龙料, HP无卤 NK为NO MARK MK为有MARK
 1单排 B黑色 B带扣 1为PPS, 2为PBT, 3为LCP, NF普通含卤
 2双排 R红色 U超薄 4为ABS, 5为PA6T, 6为PA66
 L蓝色 PH组合排针 6为PA66
 Y黄色 FH组合排母
 G绿色
 V示意180°直针, VS立式 G示意PIN针镀金, S为PIN针镀锡
 R示意90°弯针, RS卧式
 W示意针座 W后无0默认材质为V0
 W后带2示意V2

SPECIFICATIONS
 Current Rating: 1A AC,DC
 Voltage Rating: 125V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 20mΩ Max.
 Insulation Resistance: 100MΩ Min.
 Withstanding Voltage: 500V AC/minute
 Pin Material: Brass/Gold-plated
 Solder Tabs: Brass/Gold-plated
 Material: Nylon 6T,UL94V-0
 Color: Natural(Beige)

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY	料号PART NO: EST1255WRS-1*NPX-X	品名 TITLE: 超薄MX1.25-WAFER(卧贴)	材料:	单位: MM	包装规格:	比例: 1:1	日期: 2022.4.16



东莞市羿通实业有限公司
 DONGGUAN EASTOM ELECTRONIC Co., Ltd.

一般公差
 GENERAL TOLERANCE
 X.X ±0.25
 X.XX ±0.20
 ANGLE ±1°

