


### 主要技术参数 Main Specifications

- 线数 (Poles): 02 to 15
- 接触电阻 (Contact resistance):  $\leq 20m\Omega$
- 绝缘电阻 (Insulation resistance):  $\geq 100M\Omega$
- 额定电压 (Rated voltage): 50V AC DC
- 额定电流 (Rated current): 1.0A AC DC
- 耐电压 (Withstand Voltage): 500V AC/minute
- 温度范围 (Temperature Range):  $-40^{\circ}C \sim +110^{\circ}C$

孔位	DIM A	DIM B	DIM C
2P	1.25	5.75	3.75
3P	2.50	7.00	5.00
4P	3.75	8.25	6.25
5P	5.00	9.50	7.50
6P	6.25	10.75	8.75
7P	7.50	12.00	10.00
8P	8.75	13.25	11.25
9P	10.00	14.50	12.50
10P	11.25	15.75	13.75
11P	12.50	17.00	15.00
12P	13.75	18.25	16.25
13P	15.00	19.50	17.50
14P	16.25	20.75	18.75
15P	17.50	22.00	20.00

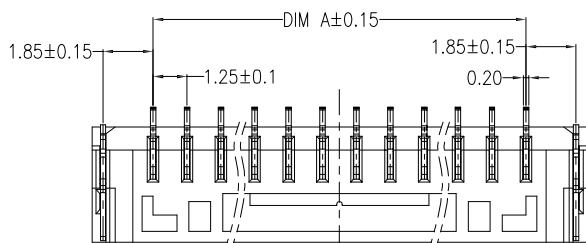

EST1255 W VS - 1\*NP X - X - 7S - NK-HF

W 示意针座  
 W后无0默认材质为V0  
 W后带2示意V2  
 VS 180°直针, VS立式  
 R 示意90°弯针, RS卧式

1 单排  
 2 双排  
 X本色  
 B黑色  
 R红色  
 L蓝色  
 Y黄色  
 G绿色

X普通  
 B带扣  
 U超薄  
 PH组合排针  
 FH组合排母

NK为NO MARK  
 MK为有MARK  
 HF无卤  
 NF普通含卤

XG中的X示意尼龙料,  
 1为PPS, 2为PBT, 3为LCP,  
 4为ABS, 5为PA6T,  
 6为PA66, 7为PA9T  
 G示意PIN针镀金, S为PIN针镀锡

ITEM	COMPONENT	Q'TY	MATERIAL	FINISH
C	SOLDER TAB	2 PCS	PhosphorBronze	MATTE Sn-plated
B	CONTACT	02~15PCS	PhosphorBronze	MATTE Sn-plated
A	PEDESTAL	1 PCS	LCP	UL 94V-0, COLOR:BEIG

**东莞市羿通实业有限公司**  
**DONGGUAN EASTOM ELECTRONIC Co., Ltd.**

料号PART NO: EST1256WVS-1*NPX-X				一般公差 GENERAL TOLERANCE X.X ±0.25 X.XX ±0.20 ANGLE ±1°
品名 TITLE: GH1.25立贴				
材料:	单位: MM	包装规格:	比例: 1:1	
制图:	审核:	核准:	日期: 2022.4.17	

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY