



13790510059

5


4

3


2

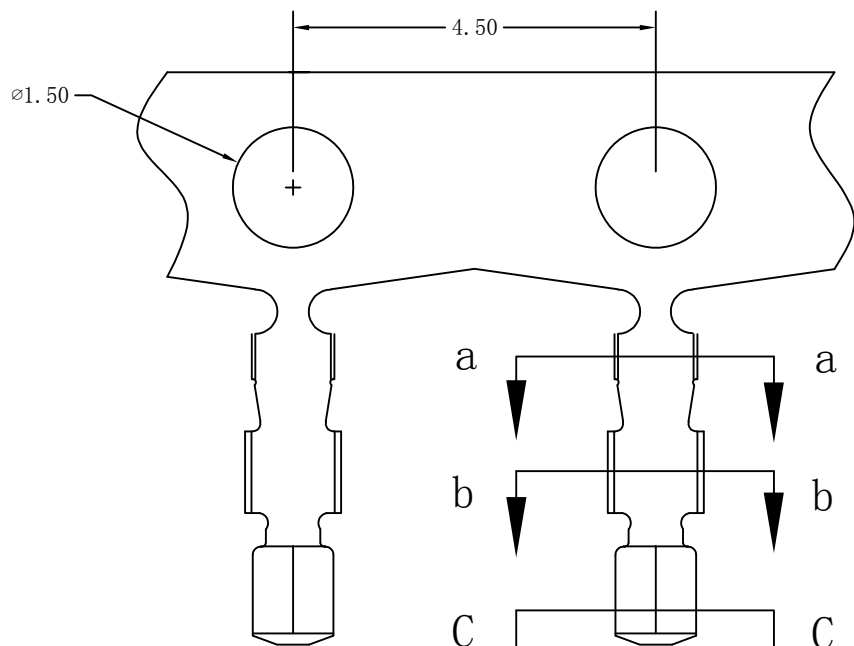


a-a



b-b




c-c

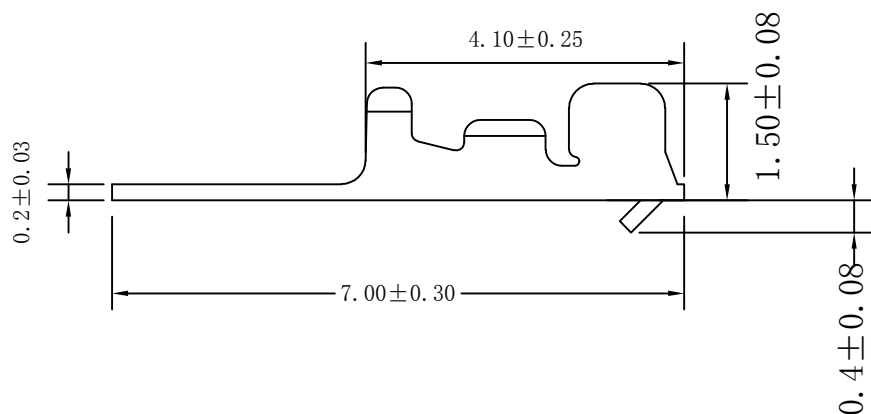

技术参数: SPECIFICATIONS

- 适用线规: AWG#28~#30
Applicable wire: AWG#28~#30
- 额定电压: 250V DC/AC (有效值)
Voltage rating: 250V DC/AC (rms)
- 额定电流: 2.5-1.0A
Current rating: 2.5-1.0A
- 耐压值: 800V AC(有效值)
Withstand voltage: 800V AC(rms)
- 工作温度: -25℃~+85℃
Working Temperature: -25℃+85℃
- 绝缘电阻: ≥1000MΩ
Insulation resistance: ≥1000MΩ
- 接触电阻: ≤0.02Ω
Contact resistance: ≤0.02Ω

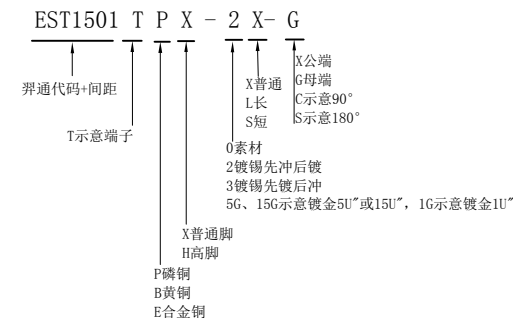

东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.


料号PART NO: EST1501TPX-2X-G

品名 TITLE: ZH1.5-T

材料: C5191	单位: MM	包装规格: 20K/卷	比例: 1:1
制图:	审核:	核准:	日期: 2022.4.18

一般公差 GENERAL TOLERANCE
X.X ±0.15
X.XX ±0.05
ANGLE ±1°

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY



EST NEW MODE

6

5

4

3

2

1