

13790510059




5

4


3

2


1

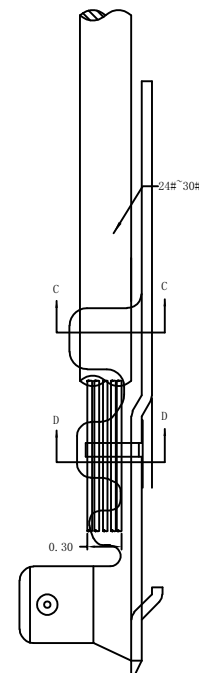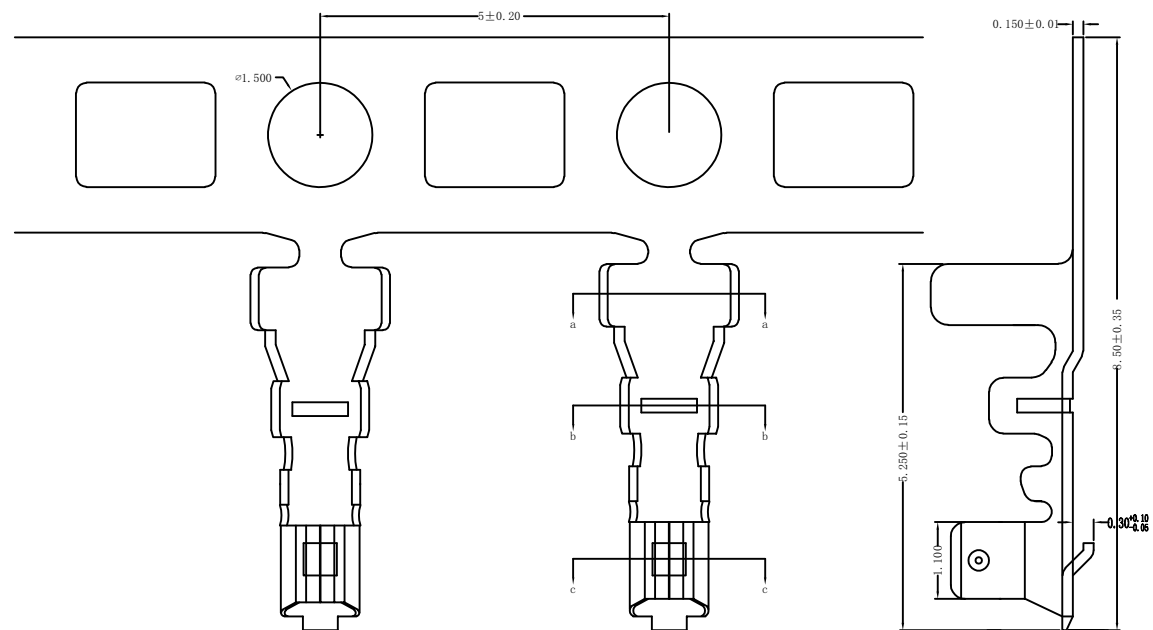

sec: a-a  
scale: 15/1




sec: b-b  
scale: 15/1



sec: b-b  
scale: 15/1

EST1503 T P X - 2 X - G

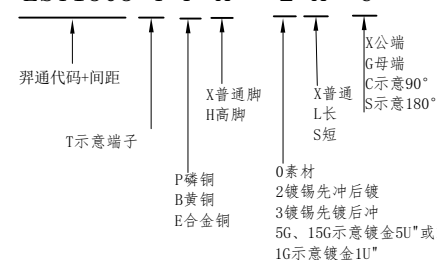

**SPECIFICATIONS**

- Voltage rating: 250V AC/DC;
- Current rating: 1.5A AC/DC;
- Withstanding Voltage: 500V AC/minute
- Insulation resistance: 1000MΩ Min
- Temperature range: -40°C ~ +105°C
- Contact resistance: 20mΩ Max
- Material: C5191
- Wire size: AWG #24~#30



东莞市羿通实业有限公司  
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号 PART NO: EST1503TPX-2X-G

品名 TITLE: MX1.5-T

材料: C5191

单位: MM

包装规格:

比例: 1:1

制图:


审核:

核准:

日期: 2022. 4. 19

| 日期版次<br>REVISION | 日期<br>DATE | 变更内容<br>DESCRIPTION | 核 准<br>APPROVAL BY |
|------------------|------------|---------------------|--------------------|
|                  |            |                     |                    |
|                  |            |                     |                    |
|                  |            |                     |                    |

| 一般公差<br>GENERAL TOLERANCE |       |
|---------------------------|-------|
| X.X                       | ±0.30 |
| X.XX                      | ±0.25 |
| ANGLE                     | ±1°   |



6

5

4

3

2

1

HZ