

13790510059



5

4

3

2

1

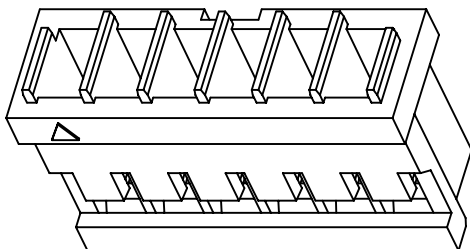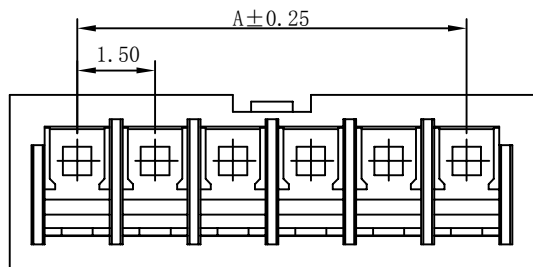

EST1503 H - 1*NP X - X - X - HF-NK - X

↑ 羿通代码+间距 ↑ PIN数 ↑ X 本色 ↑ X 公胶壳 ↑ NO MARK ↑ A 灼热丝750




1 示意单排 B 黑色 C 刺破 G 母胶壳 B 灼热丝850

2 示意双排 R 红色 2L 示意两侧带锁扣 U 超薄防呆型 H 带高凸点 LC 带低凸点 X 普通料

H 示意胶壳, G 绿色 K 卡槽 E 有耳 NE 无耳

H 后无数字默认材质V0 H 后带数字2示意材质V2

HF 示意无卤 NF 普通含卤

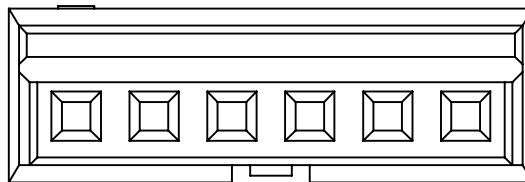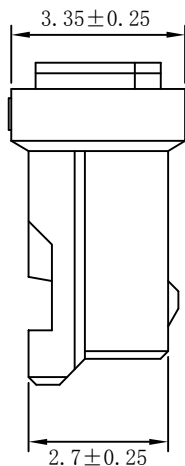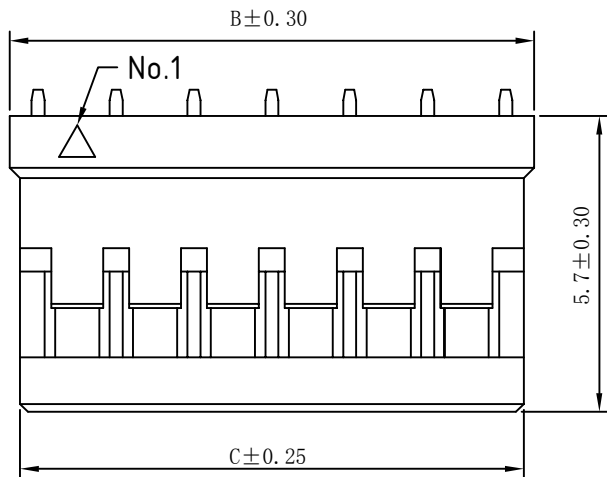

Dimensional & Ordering Information:

Circuits	Dimension mm		
	A	B	C
02	1.5	4.1	3.7
03	3.0	5.6	5.2
04	4.5	7.1	6.7
05	6.0	8.6	8.2
06	7.5	10.1	9.7
07	9.0	11.6	11.2
08	10.5	13.1	12.7
09	12.0	14.6	14.2
10	13.5	16.1	15.7
11	15.0	17.6	17.2
12	16.5	19.1	18.7
13	18.0	20.6	20.2
14	19.5	22.1	21.7
15	21.0	23.6	23.2

■ SPECIFICATIONS

- Voltage rating: 250V AC/DC;
- Current rating: 1.5A AC/DC;
- Withstanding Voltage: 500V AC/minute
- Insulation resistance: 1000MΩ Min
- Temperature range: -40°C ~ +105°C
- Contact resistance: 20mΩ Max
- Material: PA66



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST1503H-1*NPX-X-X

品名 TITLE: MX1.5-H

材料: 单位: MM 包装规格: 比例: 1:1

制图: 审核: 批准: 日期: 2022.4.19

一般公差
GENERAL TOLERANCE
X.X ±0.25
X.XX ±0.20
ANGLE ±1°

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY

6

5

4

3

2

1

HZ