

13790510059

5





4

3

2

1


1507-H	PA66 UL 94V-0	1507-T	1507
PART NO	Material	Suitable EST Terminal	Mates With EST Wafer

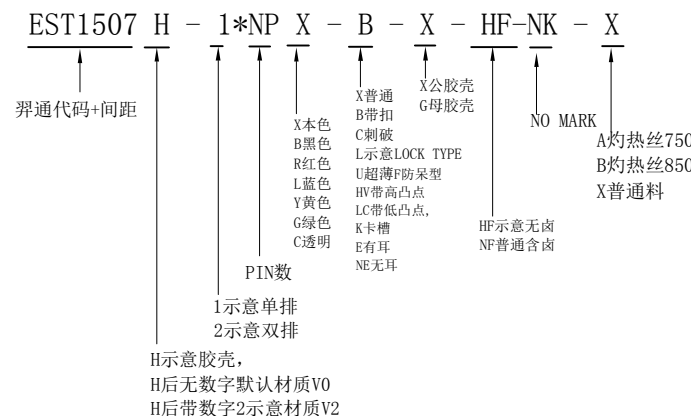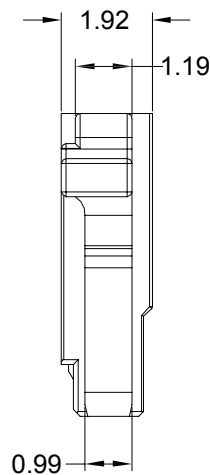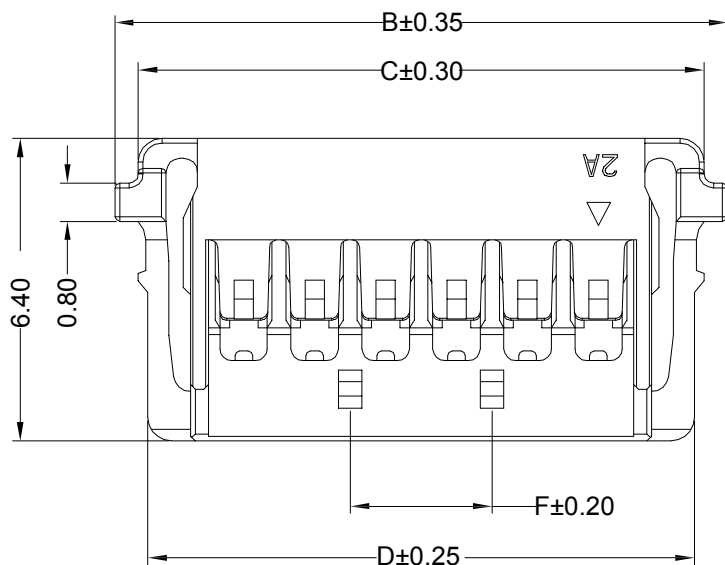

■ Specifications :

- Voltage rating: 150V AC / DC
- Current rating: 3A AC / DC
- Withstanding voltage: 500V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: ≥1000MΩ
- Contact resistance: ≤20mΩ
- After environmental testing : ≤40mΩ

Poles	Dimensions(mm)				
	A	B	C	D	F
02		6.95	5.95	5.55	
03	3.00	8.45	7.45	7.05	
04	4.50	9.95	8.95	8.55	
05	6.00	11.45	10.45	10.05	3.00
06	7.50	12.95	11.95	11.55	3.00
07	9.00	14.45	13.45	13.05	4.50
08	10.50	15.95	14.95	14.55	6.00
09	12.00	17.45	16.45	16.05	7.50
10	13.50	18.95	17.95	17.55	9.00
11	15.00	20.45	19.45	19.05	10.50
12	16.50	21.95	20.95	20.55	12.00

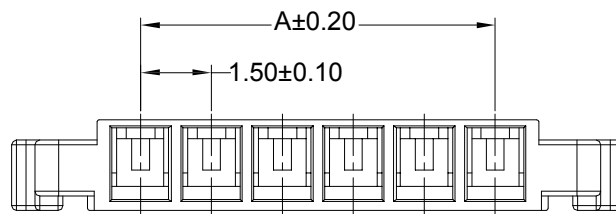

东莞市羿通实业有限公司  
DONGGUAN EASTOM ELECTRONIC Co., Ltd.


料号PART NO: EST1507H-1\*NPX-X

品名 TITLE: 1507-H

材料: 单位: MM 包装规格: 比例: 1:1

日期版次 REVISION 日期 DATE 变更内容 DESCRIPTION 核 准 APPROVALBY 制图: 审核: 核准: 日期: 2021.12.08

一般公差  
GENERAL TOLERANCE  
X, X ±0.30  
X, XX ±0.20  
ANGLE ±1°



6

5

4

3

2

1

SL